



SWADLING


BRASSWARE

INSTALLATION INSTRUCTIONS

Projection arm

9610000OOX

8610000OOX

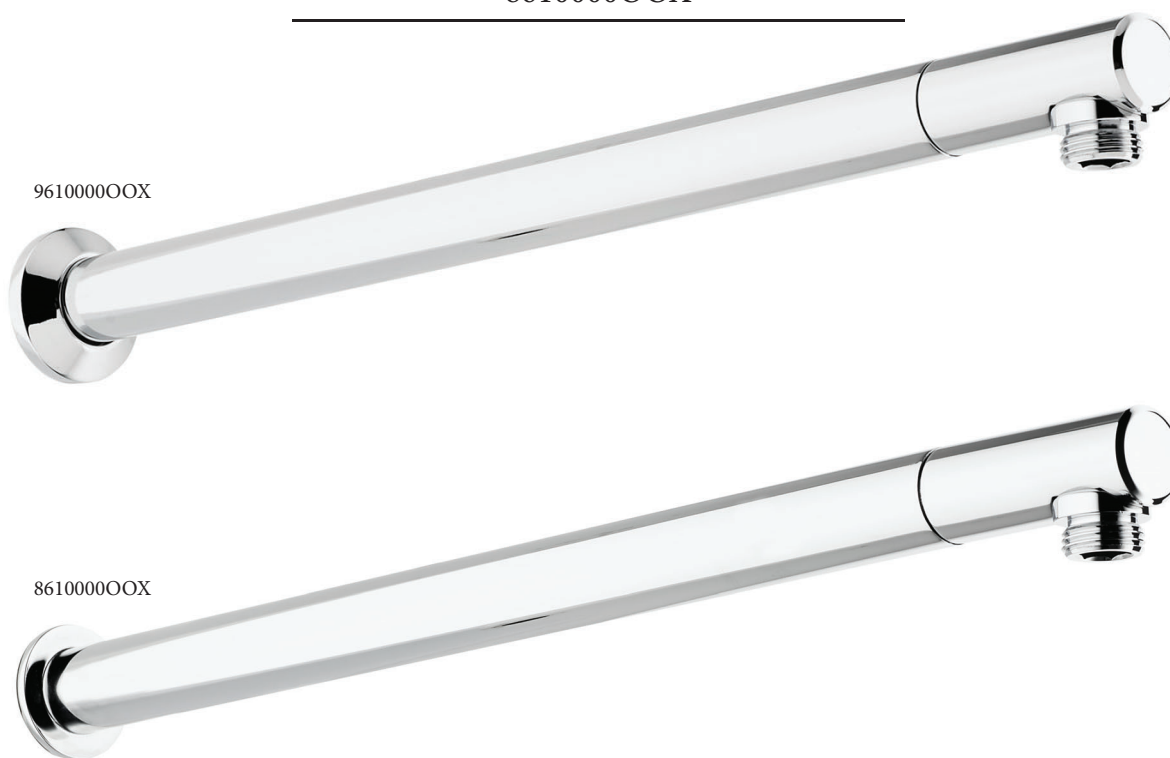


IMPORTANT INSTALLATION INFORMATION

- Before Installation, please check all parts against the parts list on the back page of this booklet.
- Make sure that the parts are undamaged and that their finish is as expected.
- Should you find a faulty or damaged part, please be in touch with our Customer Services Team immediately using the contact details below.
- Any claim for faulty or damaged parts will require the affected part to be returned to Swadling Brassware for inspection and testing.
- No claim for damaged parts or issues with a product finish will be accepted after the product has been installed.

Swadling Brassware, Churchward Road, Yate, Bristol, BS37 5PL
Telephone: 01454 322888 **Email:** techsupport@swadlingbrassware.co.uk




DIMENSIONS

INLET BLANKING PLUG (6251 AF).
USED TO SEAL REDUNDANT
PLUMBING OPTION.


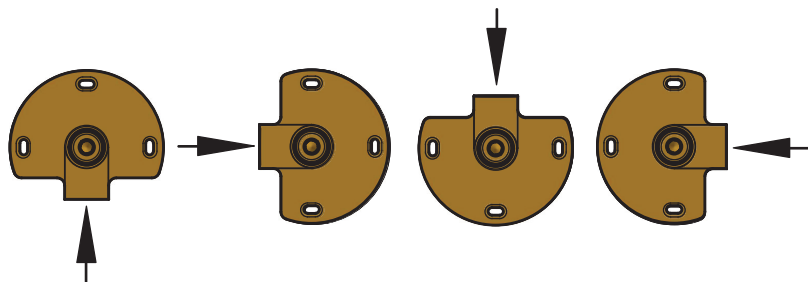


THE MANIFOLD CAN BE ROTATED 360° FOR PLUMBING
FROM LEFT, RIGHT AND FROM ABOVE.


MANIFOLD SIDE VIEW - MIN/MAX MOUNTING DEPTHS

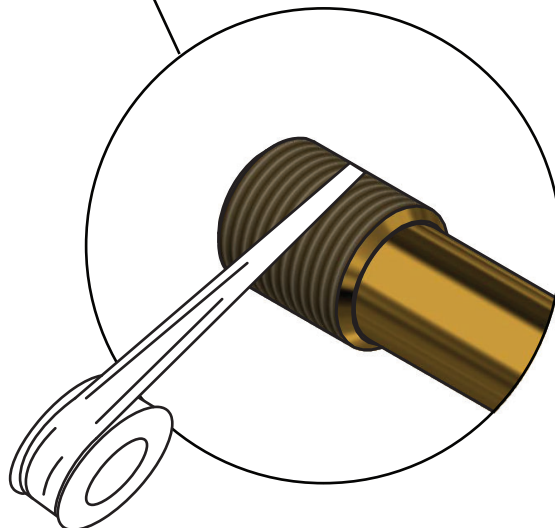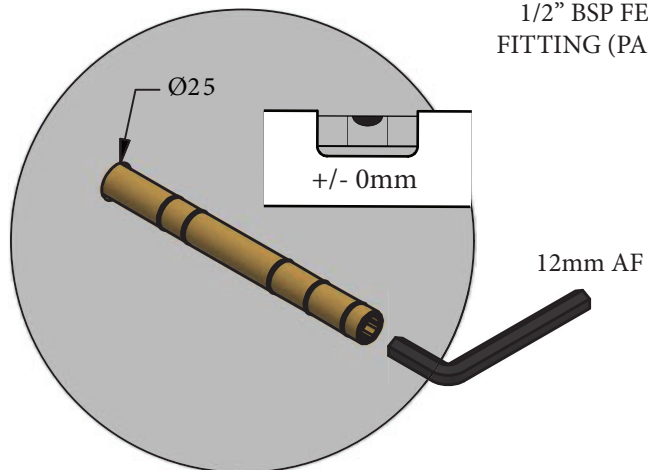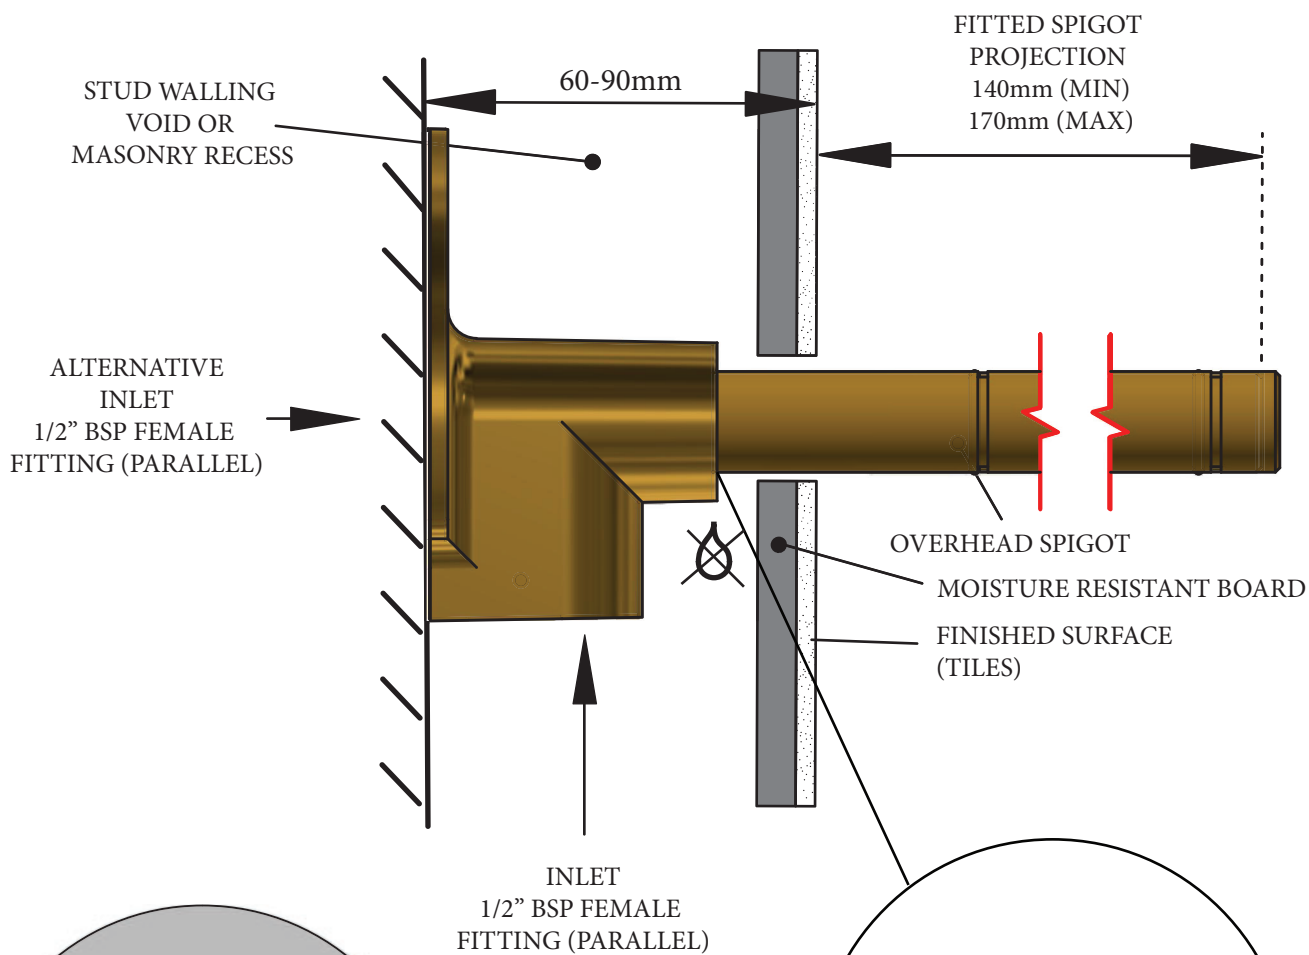

INSTALLATION

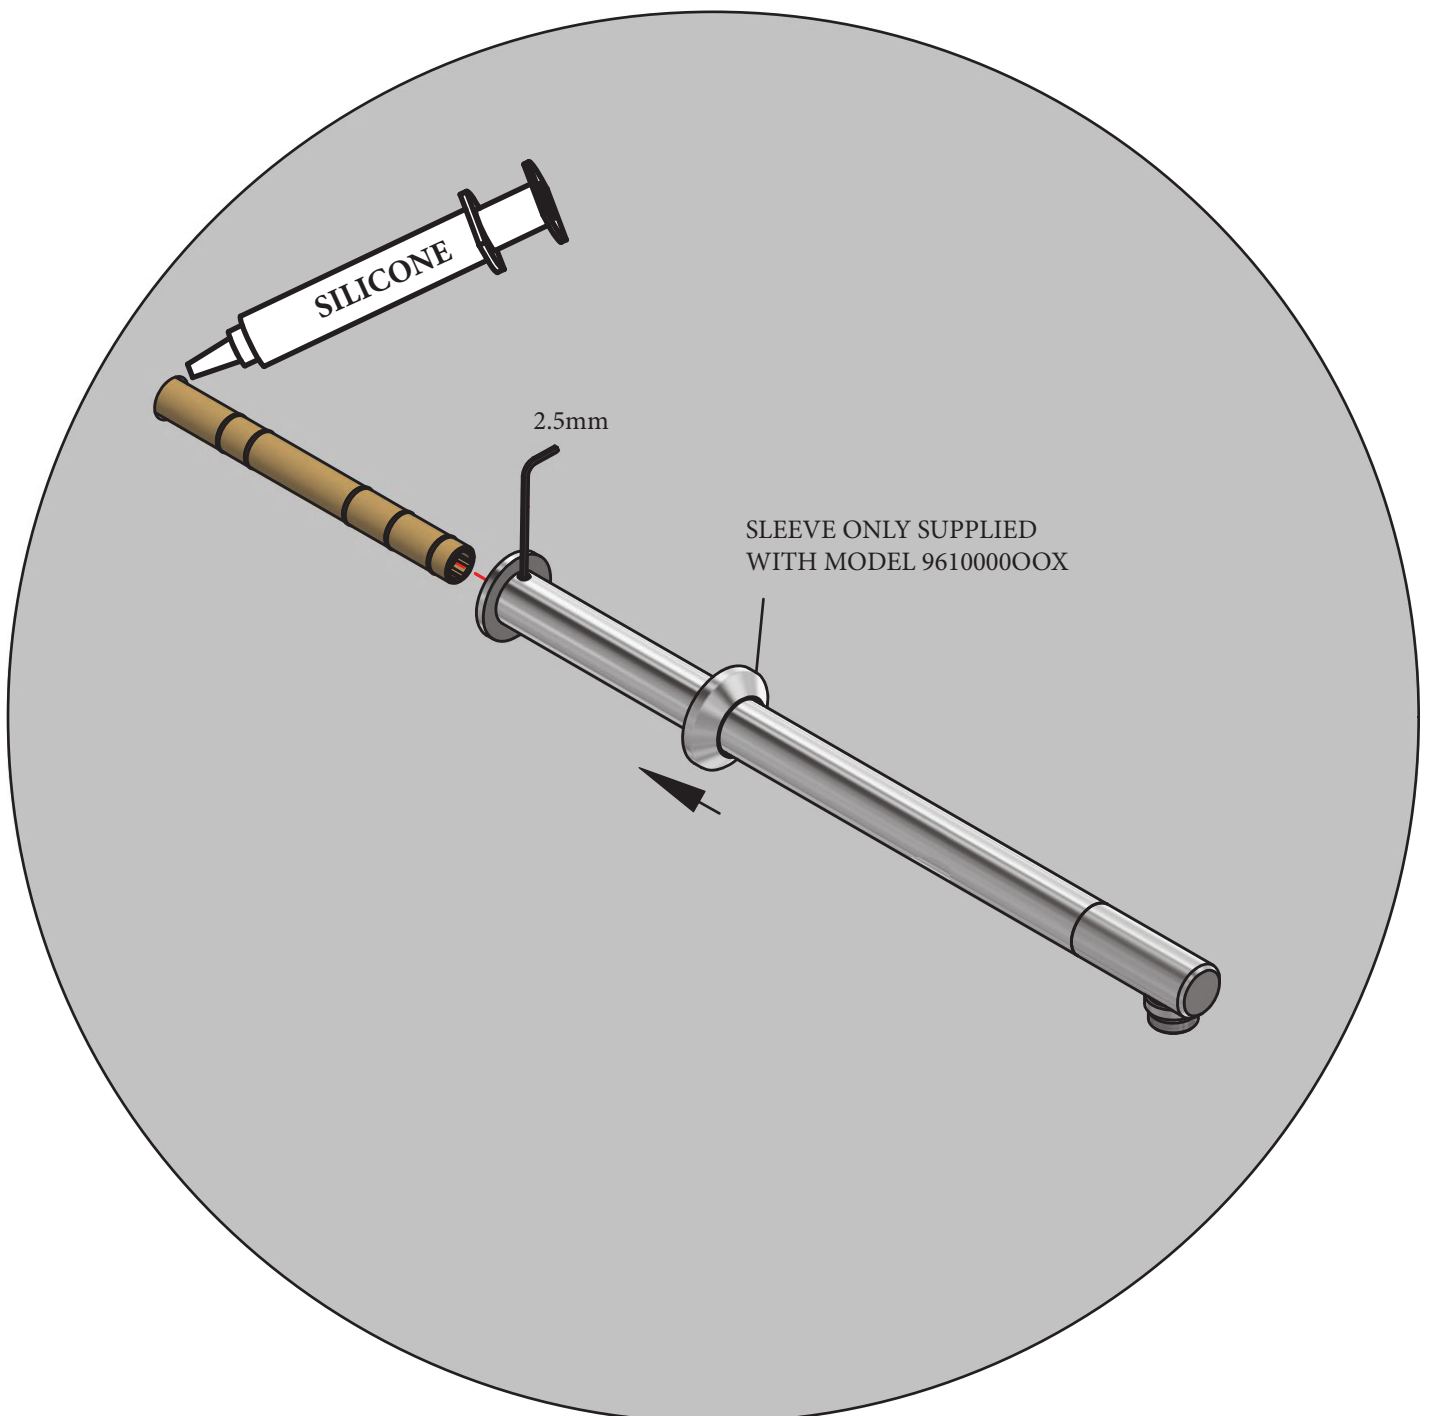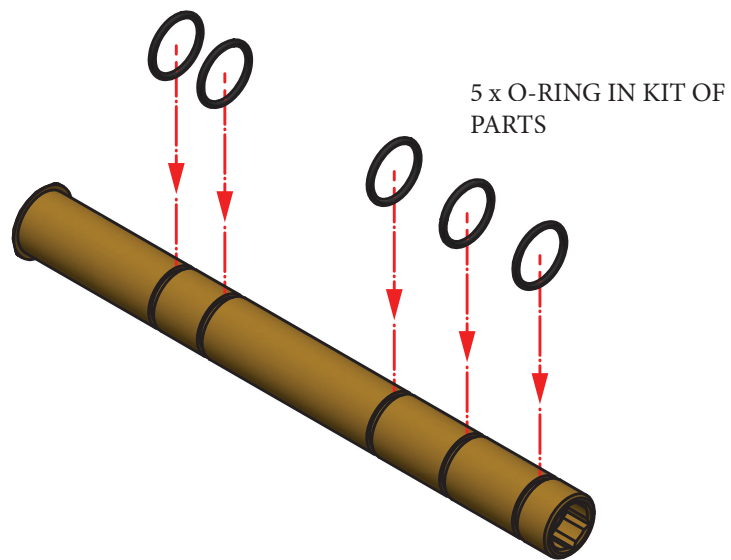

PARTS LIST

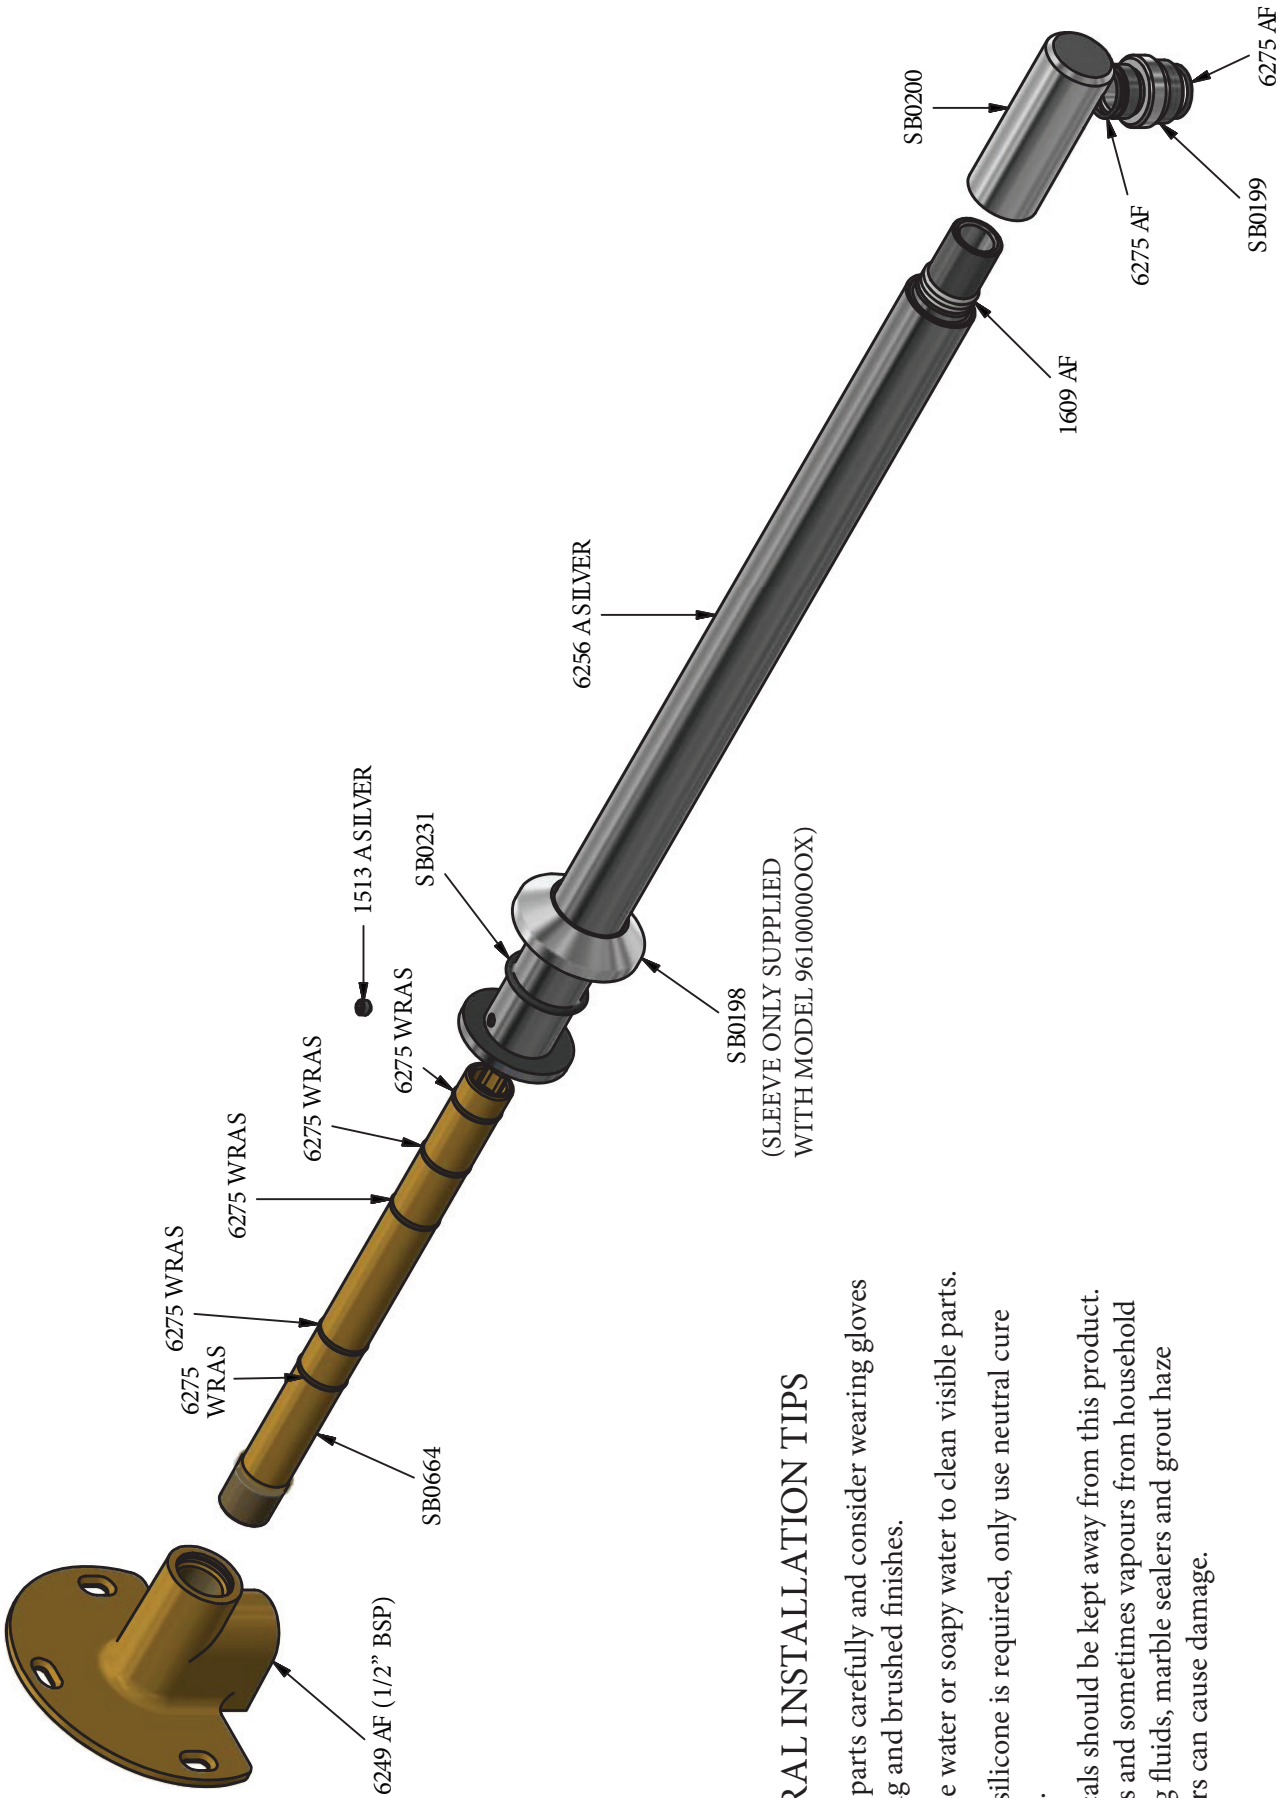

(SLEEVE ONLY SUPPLIED
WITH MODEL 9610000OX)

- Handle parts carefully and consider wearing gloves for living and brushed finishes.
- Only use water or soapy water to clean visible parts.
- Where silicone is required, only use neutral cure silicone.
- Chemicals should be kept away from this product. Splashes and sometimes vapours from household cleaning fluids, marble sealers and grout haze removers can cause damage.