



SWADLING

BRASSWARE

INSTALLATION INSTRUCTIONS

DELUGE ON ADJUSTABLE PROJECTION ARM

7671000OOX (200mm)

7671800OOX (300mm)




IMPORTANT INSTALLATION INFORMATION

- Before Installation, please check all parts against the parts list on the back page of this booklet.
- Make sure that the parts are undamaged and that their finish is as expected.
- Should you find a faulty or damaged part, please be in touch with our Customer Services Team immediately using the contact details below.
- Any claim for faulty or damaged parts will require the affected part to be returned to Swadling Brassware for inspection and testing.
- No claim for damaged parts or issues with a product finish will be accepted after the product has been installed.


Swadling Brassware, Churchward Road, Yate, Bristol, BS37 5PL
Telephone: 01454 322888 **Email:** techsupport@swadlingbrassware.co.uk

DIMENSIONS

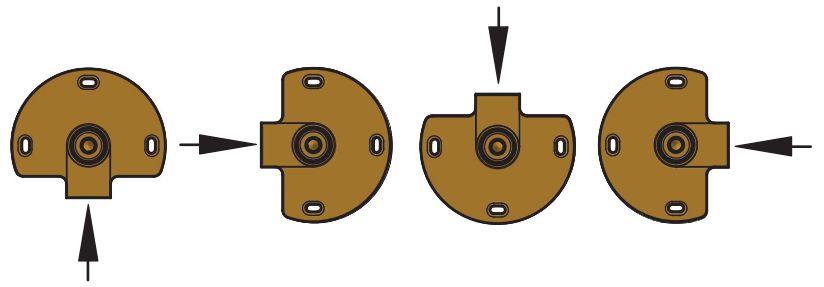


THE MANIFOLD CAN BE ROTATED 360° FOR PLUMBING FROM LEFT, RIGHT AND FROM ABOVE.

INLET BLANKING PLUG
(6251 AF).
USED TO SEAL REDUNDANT
PLUMBING OPTION.

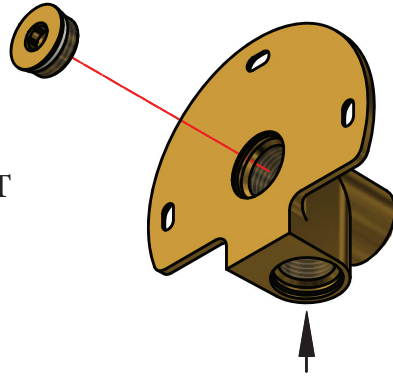


MOUNTING DEPTH SIDE VIEW

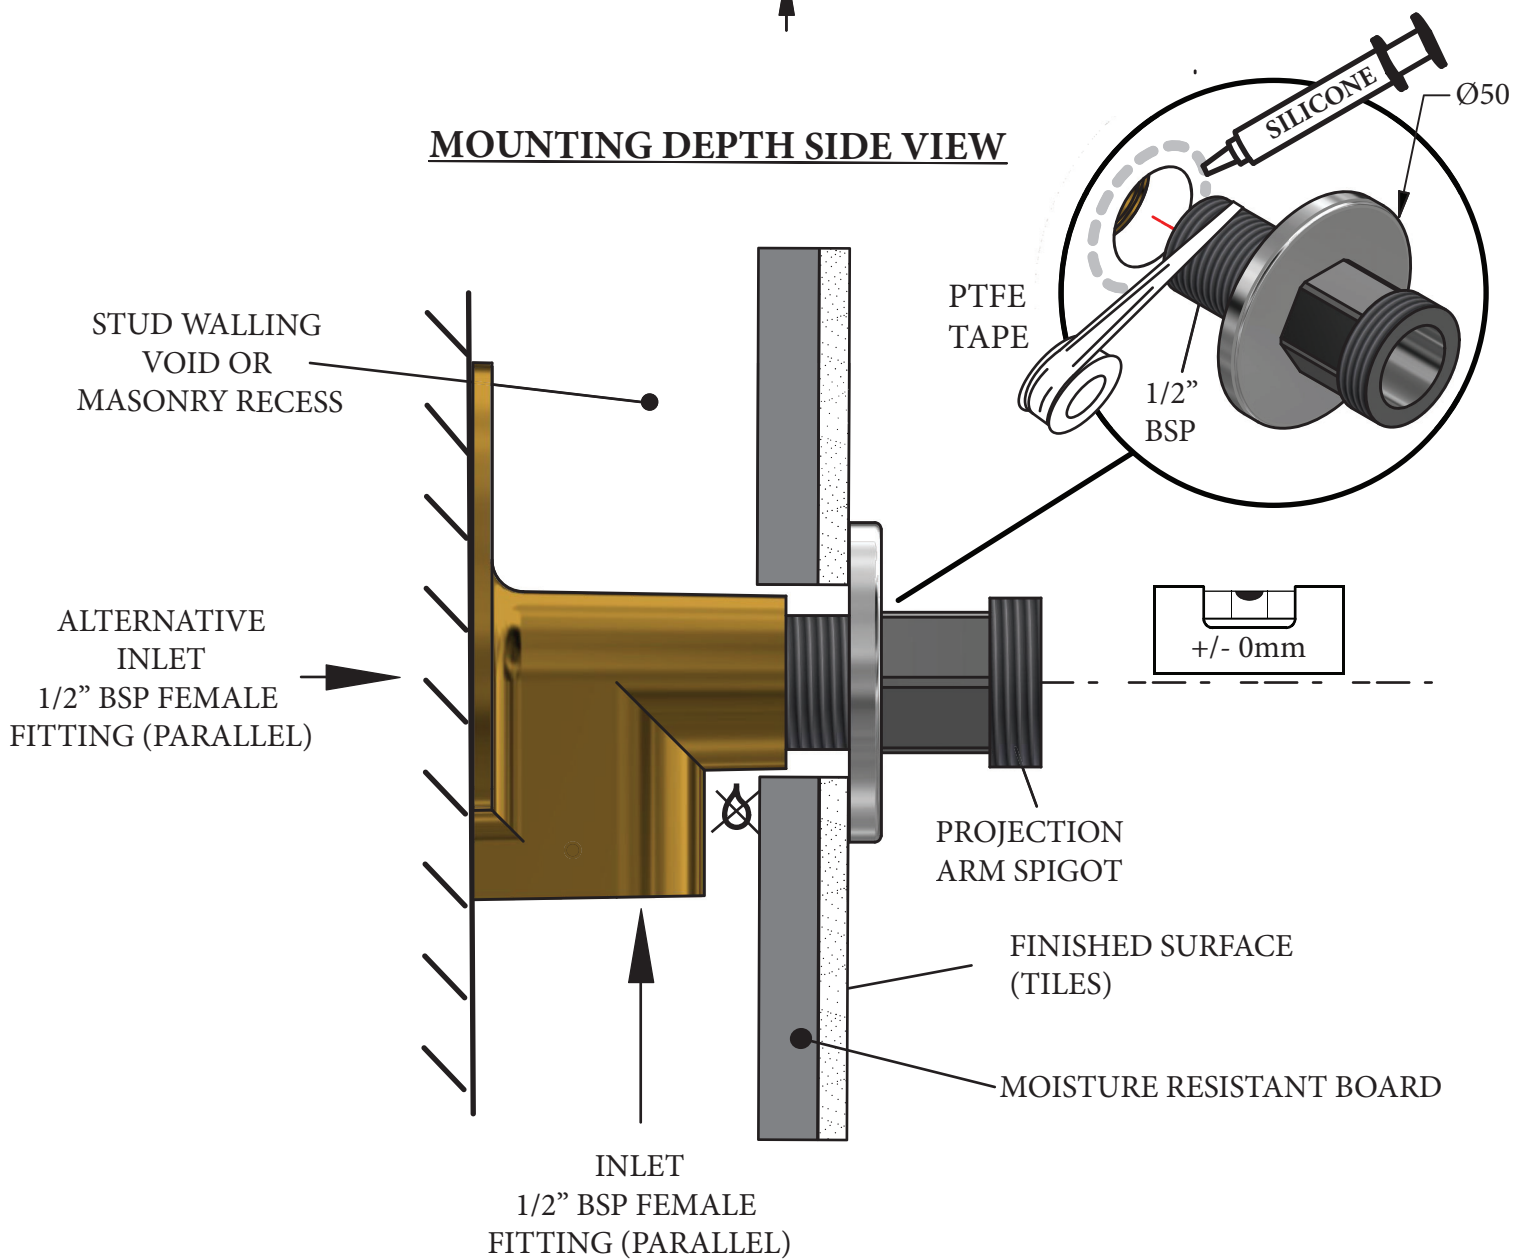


INSTALLATION

Projection arm can be cut to length if required: Remove swarf & clean. De-burr with an appropriate de-burring tool - similar to copper pipe de-burring tool and/or suitable grit paper. Remove swarf & any debris from inside.

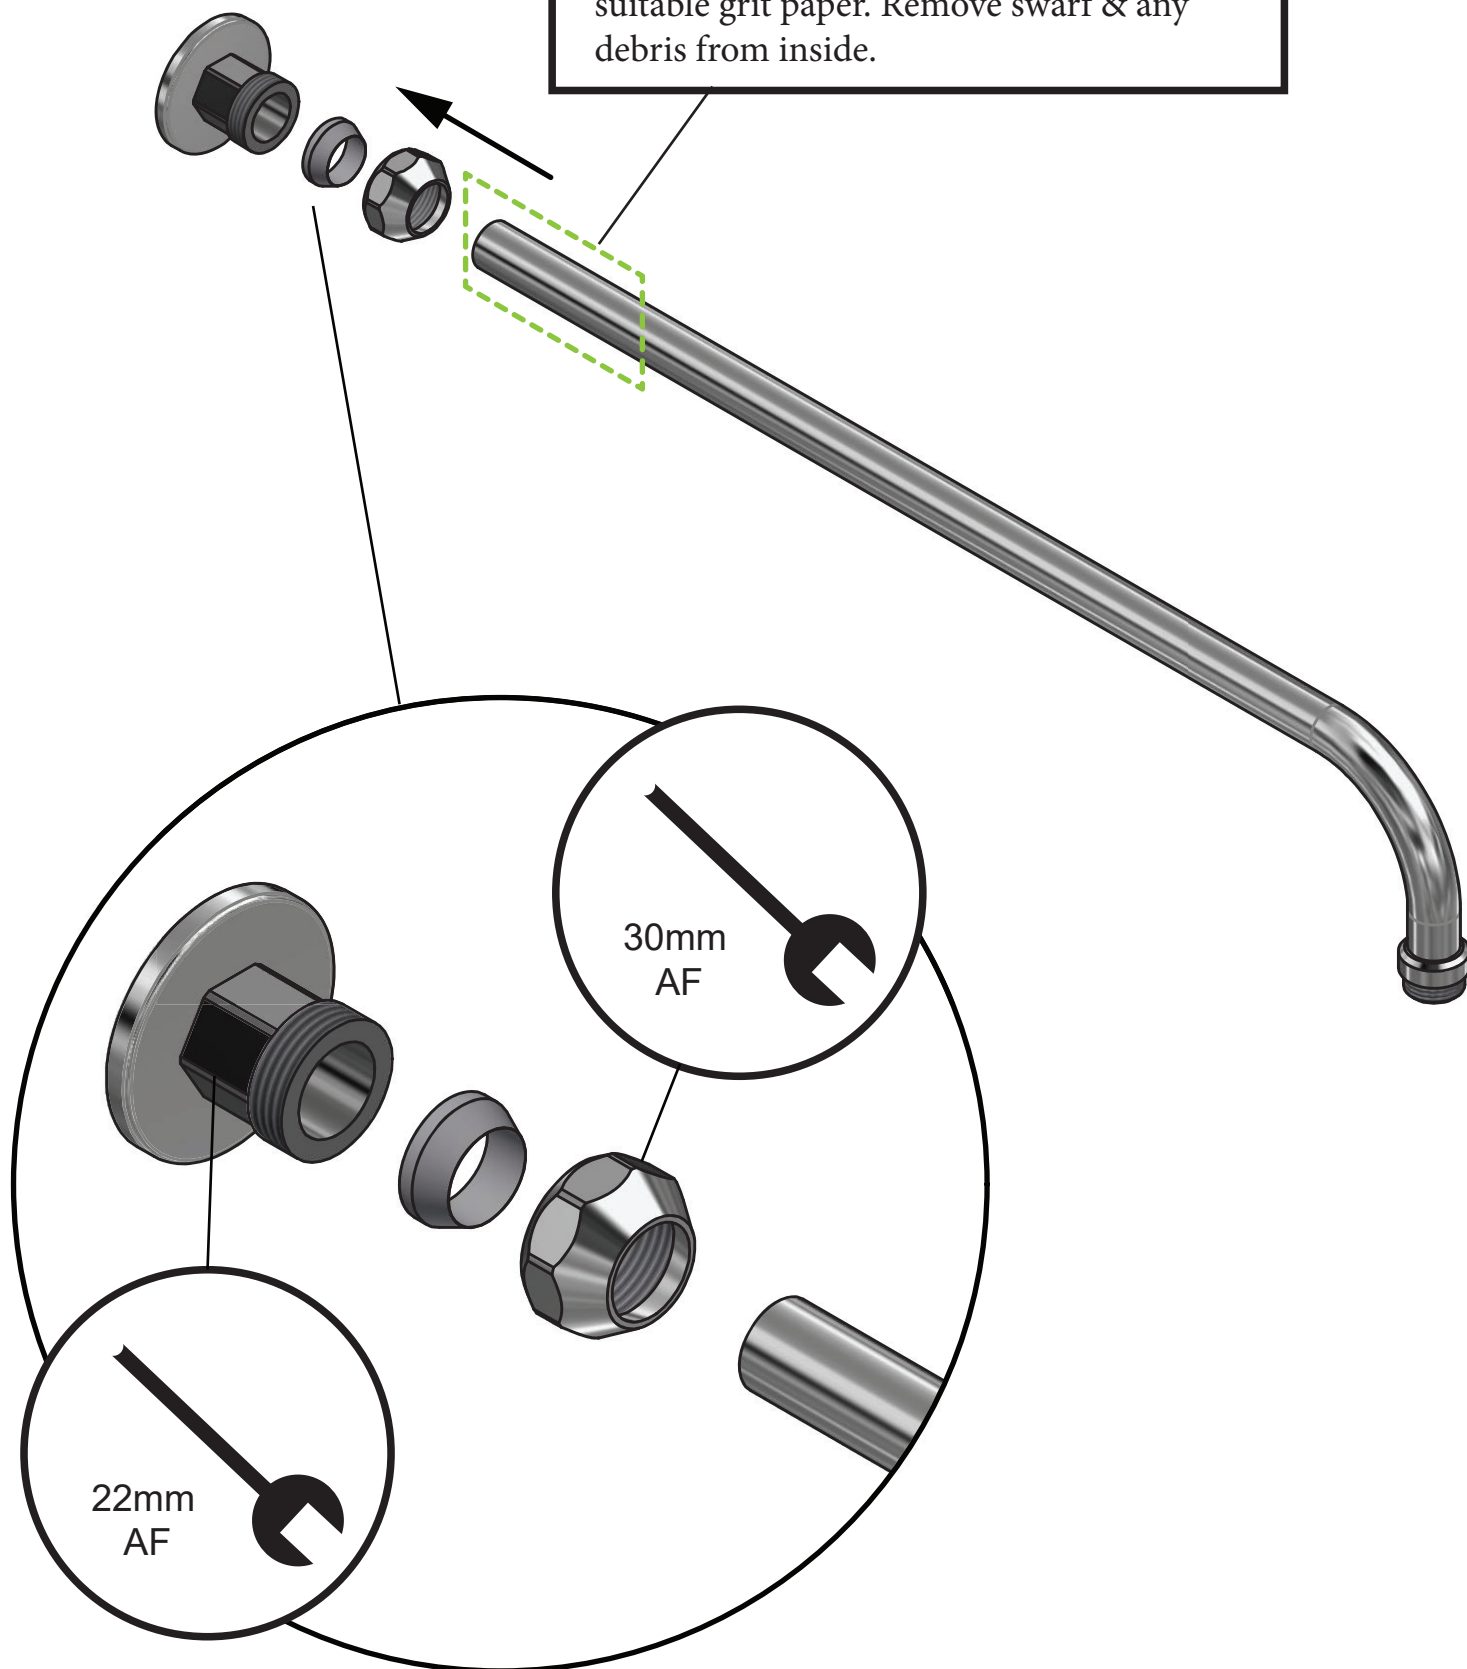

PARTS LIST

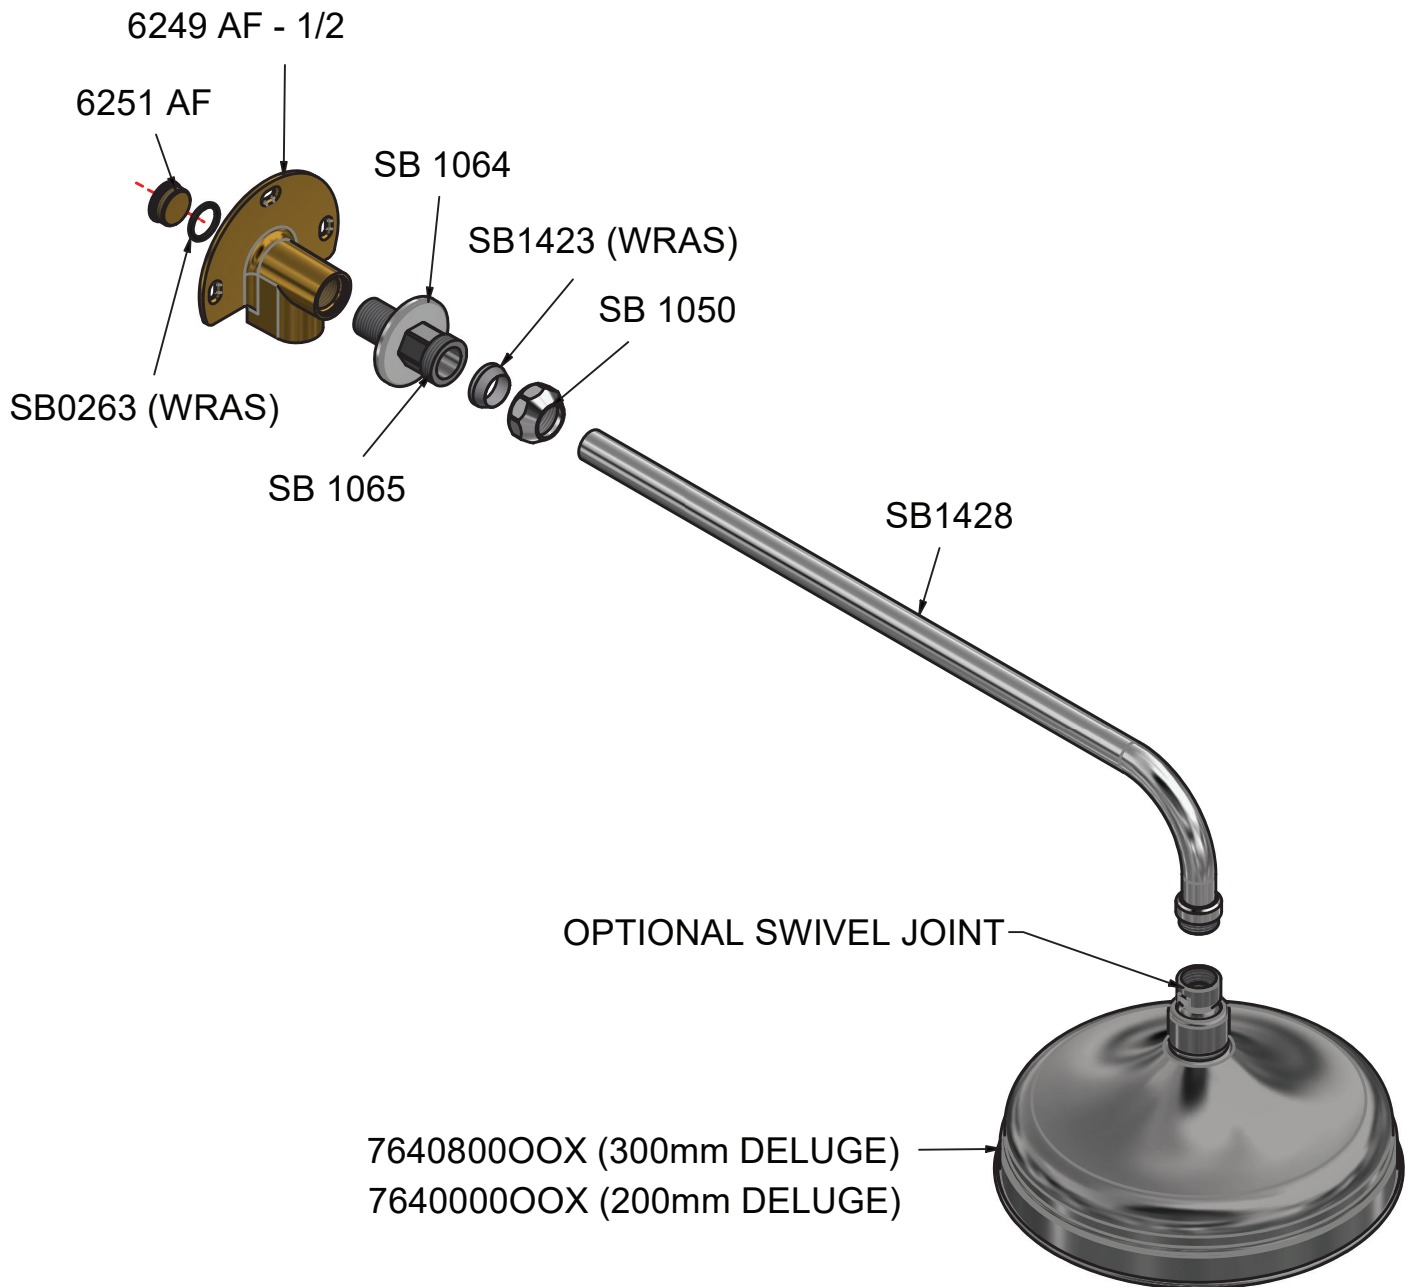

GENERAL INSTALLATION TIPS

- Handle parts carefully and consider wearing gloves for living and brushed finishes.
- Only use water or soapy water to clean visible parts.
- Where silicone is required, only use neutral cure silicone.
- Chemicals should be kept away from this product. Splashes and sometimes vapours from household cleaning fluids, marble sealers and grout haze removers can cause damage.