



SWADLING

BRASSWARE



8011000



8021000

INSTALLATION INSTRUCTIONS

Engineer Valve Trim sets

8011000 - 8021000

IMPORTANT INSTALLATION INFORMATION

- Before Installation, please check all parts against the parts list on the back page of this booklet.
- Make sure that the parts are undamaged and that their finish is as expected.
- Should you find a faulty or damaged part, please be in touch with our Customer Services Team immediately using the contact details below.
- Any claim for faulty or damaged parts will require the affected part to be returned to Swadling Brassware for inspection and testing.
- No claim for damaged parts or issues with a product finish will be accepted after the product has been installed.

Swadling Brassware, Churchward Road, Yate, Bristol, BS37 5PL, UNITED KINGDOM


Telephone: 01454 322888

Email: techsupport@swadlingbrassware.co.uk



www.swadlingbrassware.co.uk

PREPARATION


SINGLE CONTROLLED VALVE
8011000

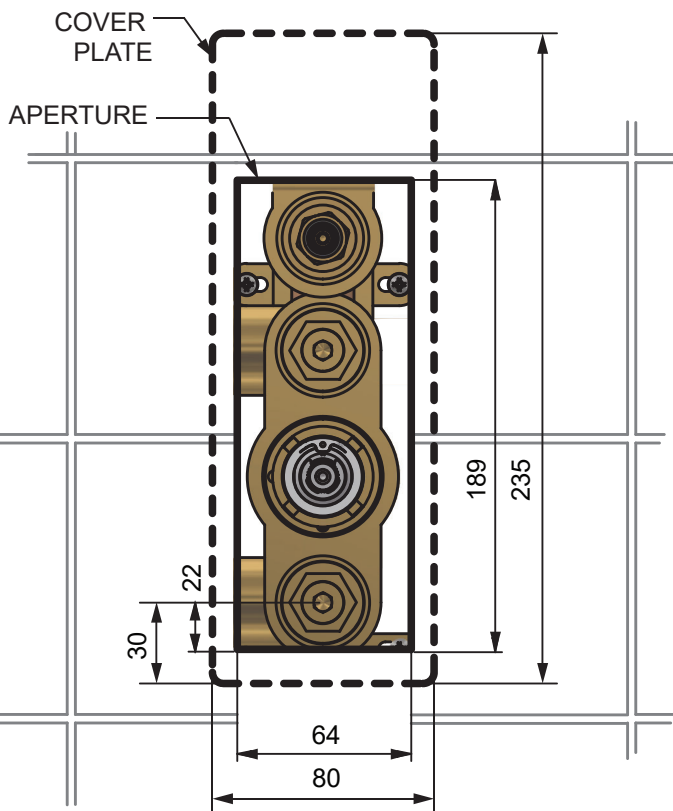

DOUBLE CONTROLLED VALVE
8021000

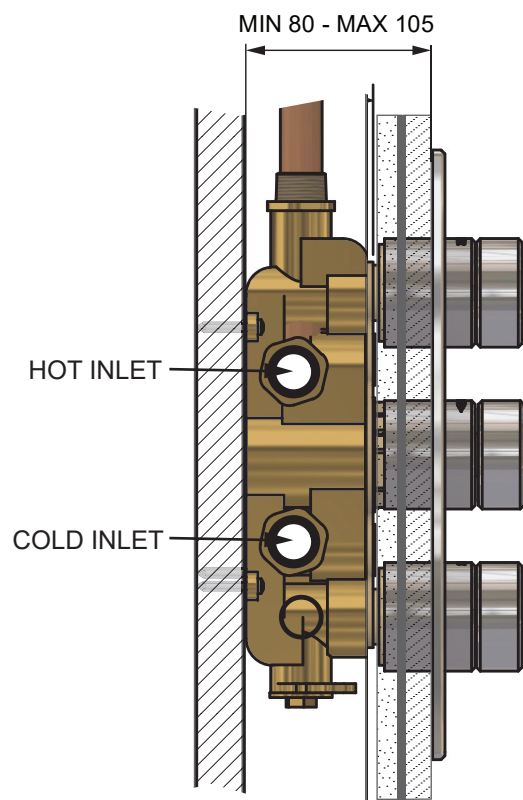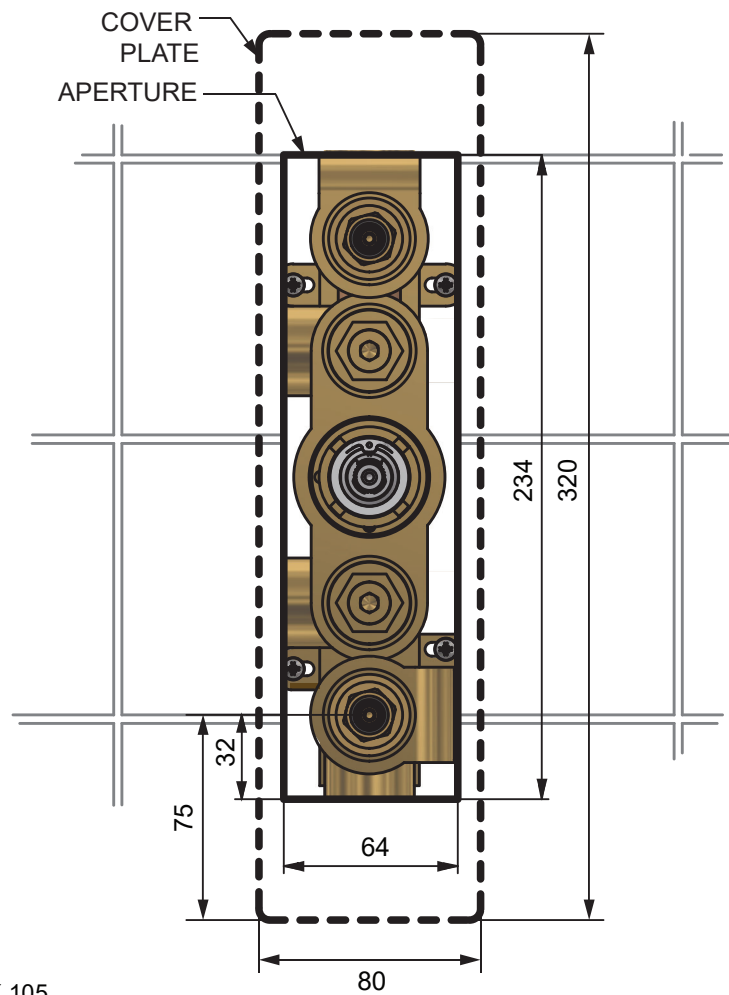

SETTING THE TEMPERATURE

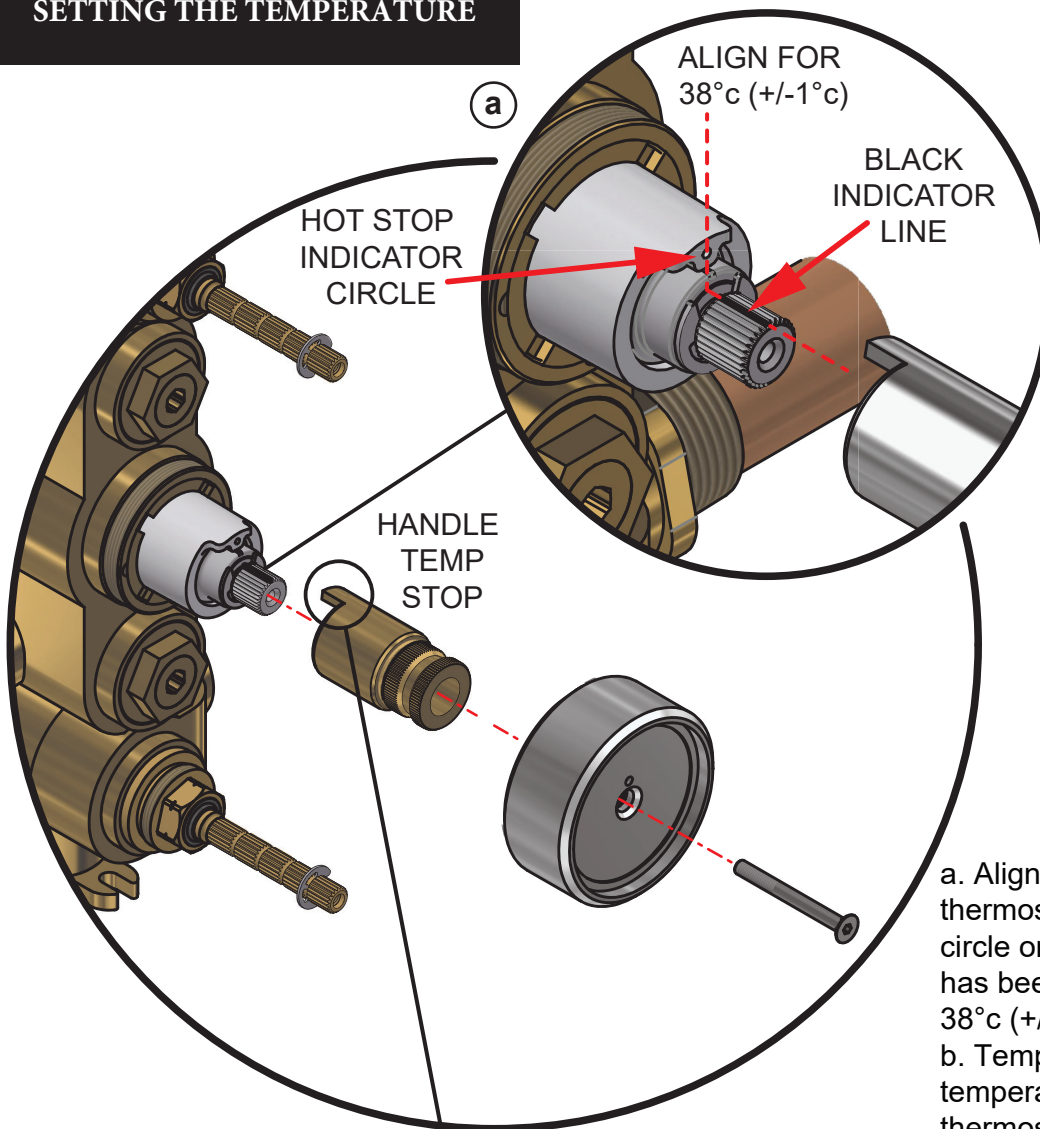

a. Align the black indicator line on the thermostatic spindle with the indicator circle on the cartridge housing. This has been factory set to achieve 38°C (+/-1°C) water temperature.


b. Temporarily assemble the temperature handle to the thermostatic cartridge making sure the handle temperature stop is against the right hand side of the thermostatic hot stop, this will be your maximum outlet temperature.

To increase the maximum outlet temperature - remove the handle assembly and re-position the handle temperature stop, rotated towards the clockwise direction by a few degrees, re-fit handle and turn back to stop position, re-test with a thermometer.

For SAFETY REASONS the maximum temperature should not exceed 41°C.


To decrease maximum temperature, using the handle, rotate temperature spline clockwise by a few degrees, remove the handle assembly and re-fit ensuring the handle temperature stop is against the right hand side of the thermostatic hot stop, re-test.

Remove handle assembly ensuring it is set in the hot stop position. Set aside handle assembly ready to assemble sleeve and plate.

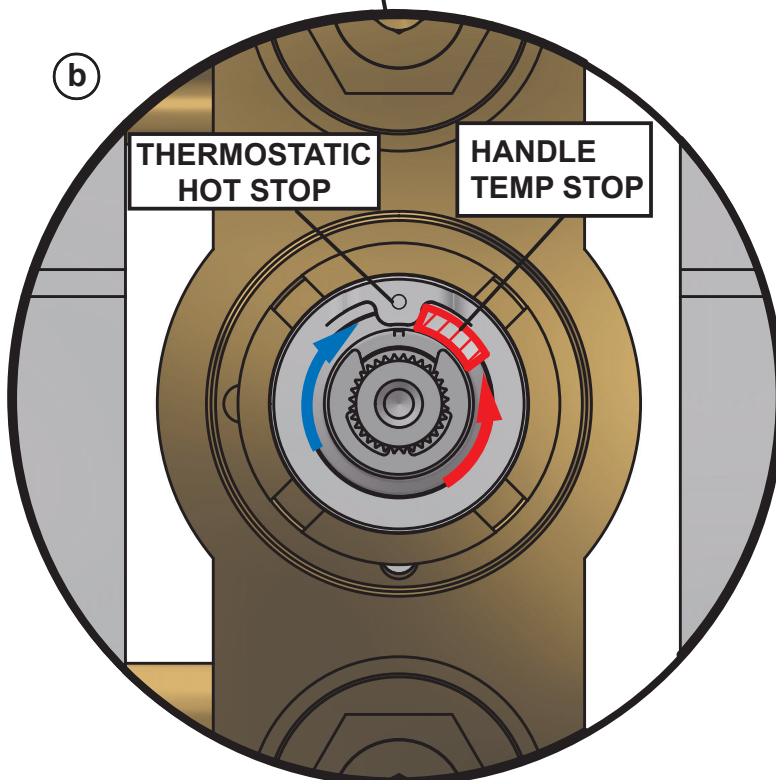

INSTALLATION

NOTE POSITION OF COLLAR ENGRAVING

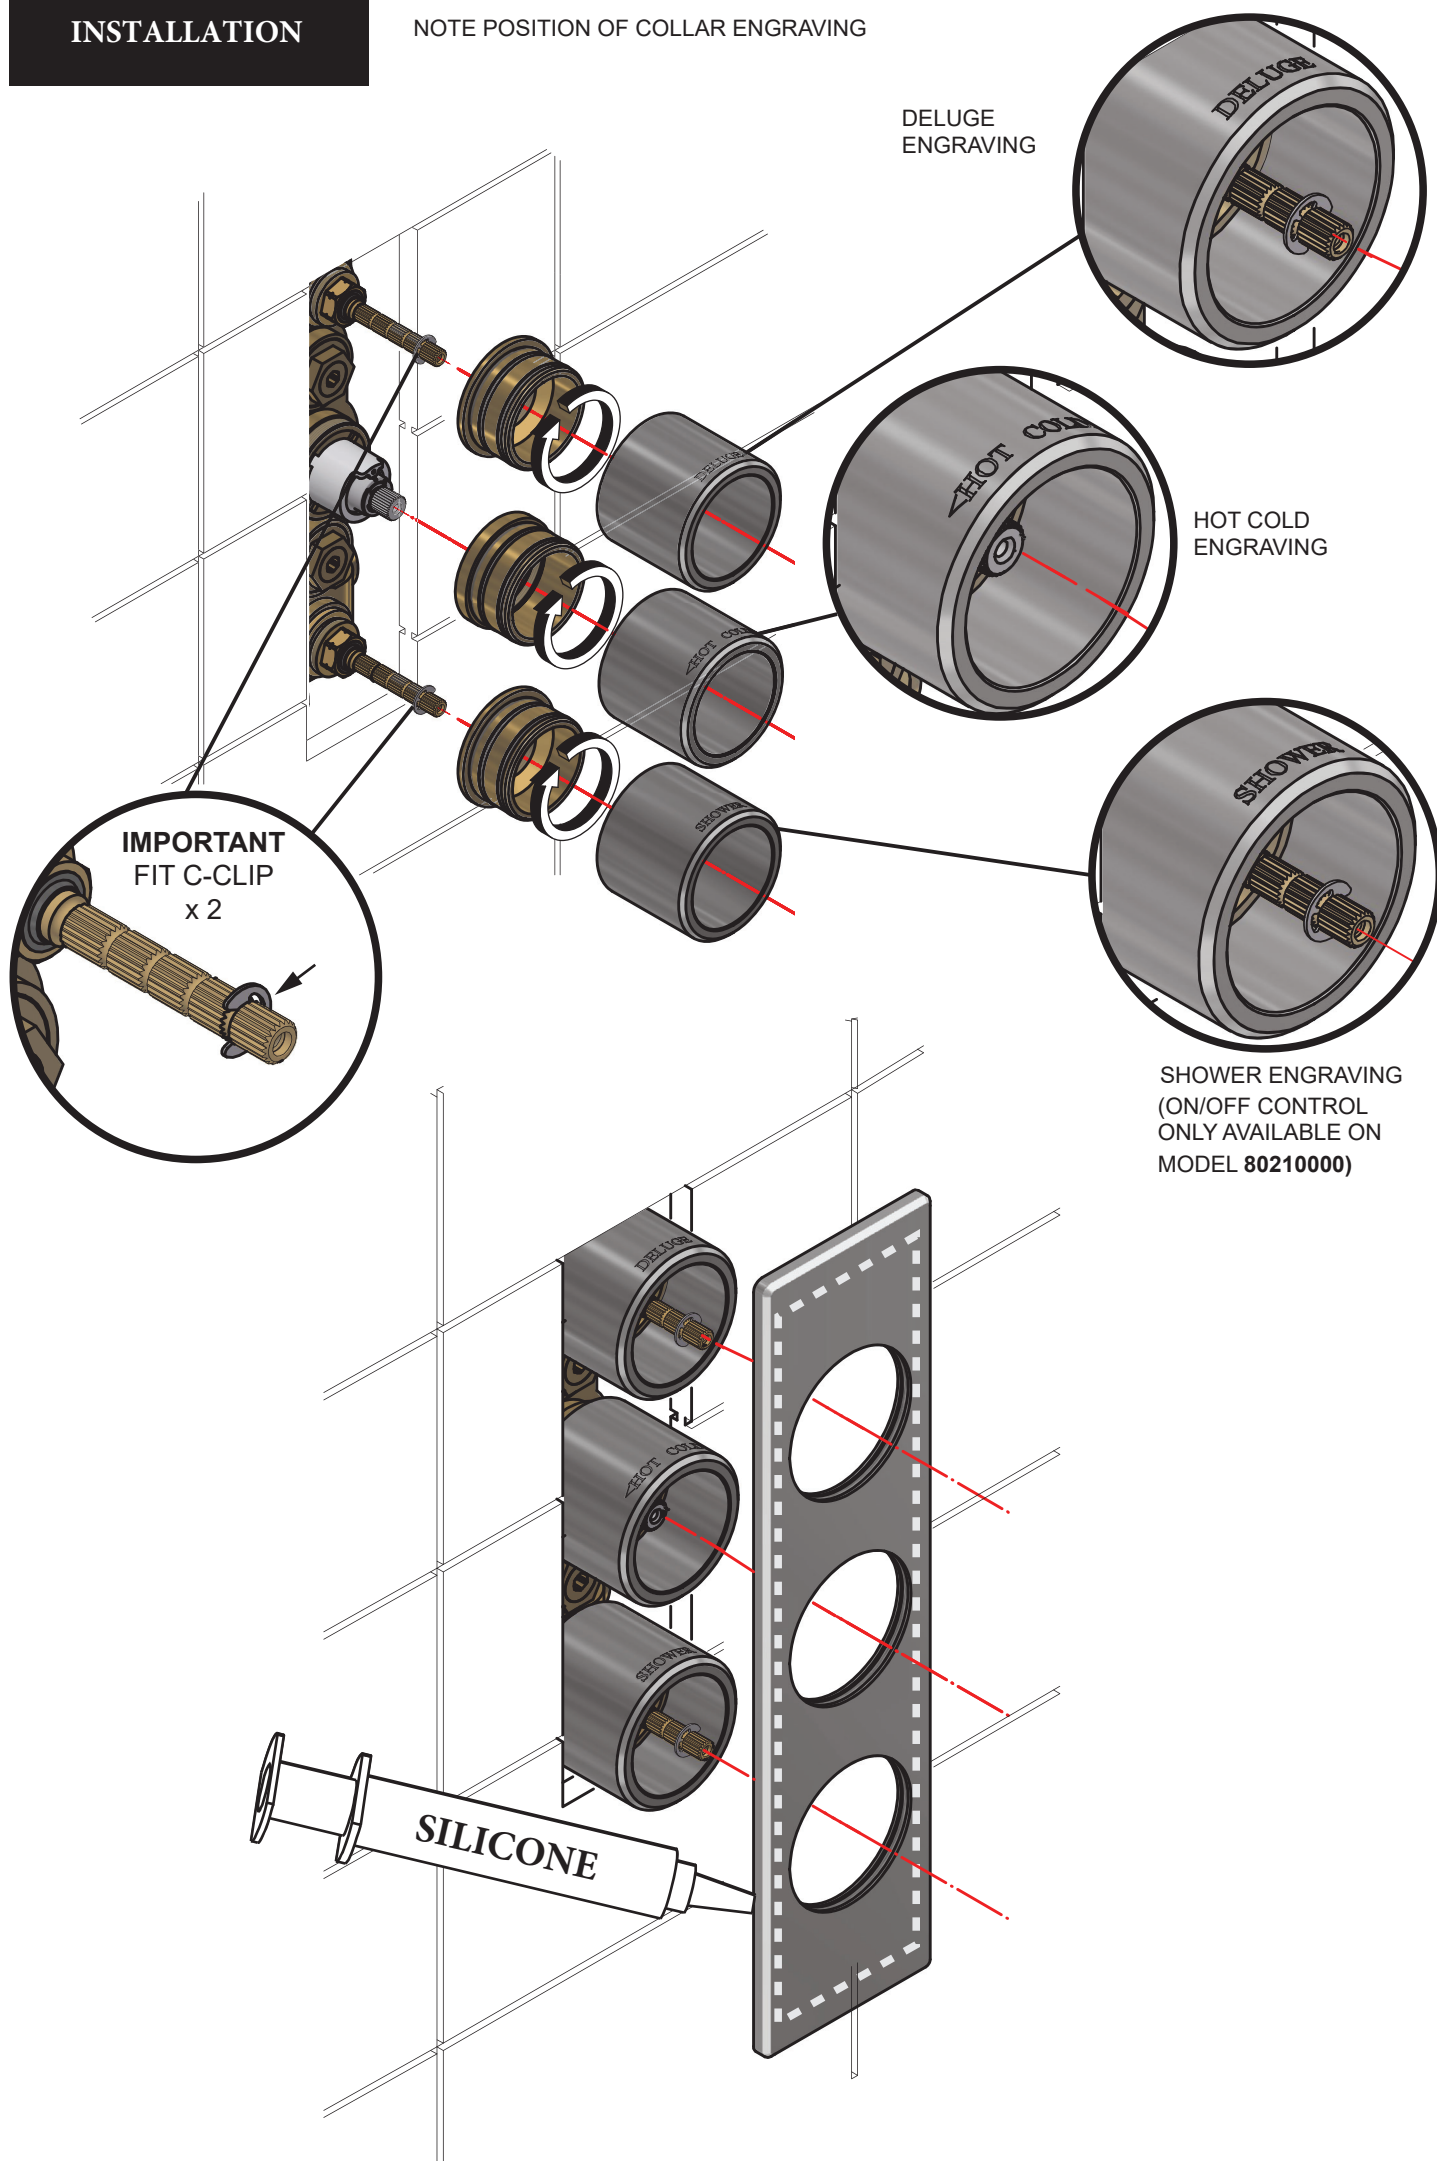


HANDLES

MODEL SHOWN IS 8021000LV

NUMBER OF ON/OFF CONTROLS VARY DEPENDING ON MODEL.

SEE 'HANDLE CONFIGURATION' PAGE FOR CORRECT HANDLE POSITIONING

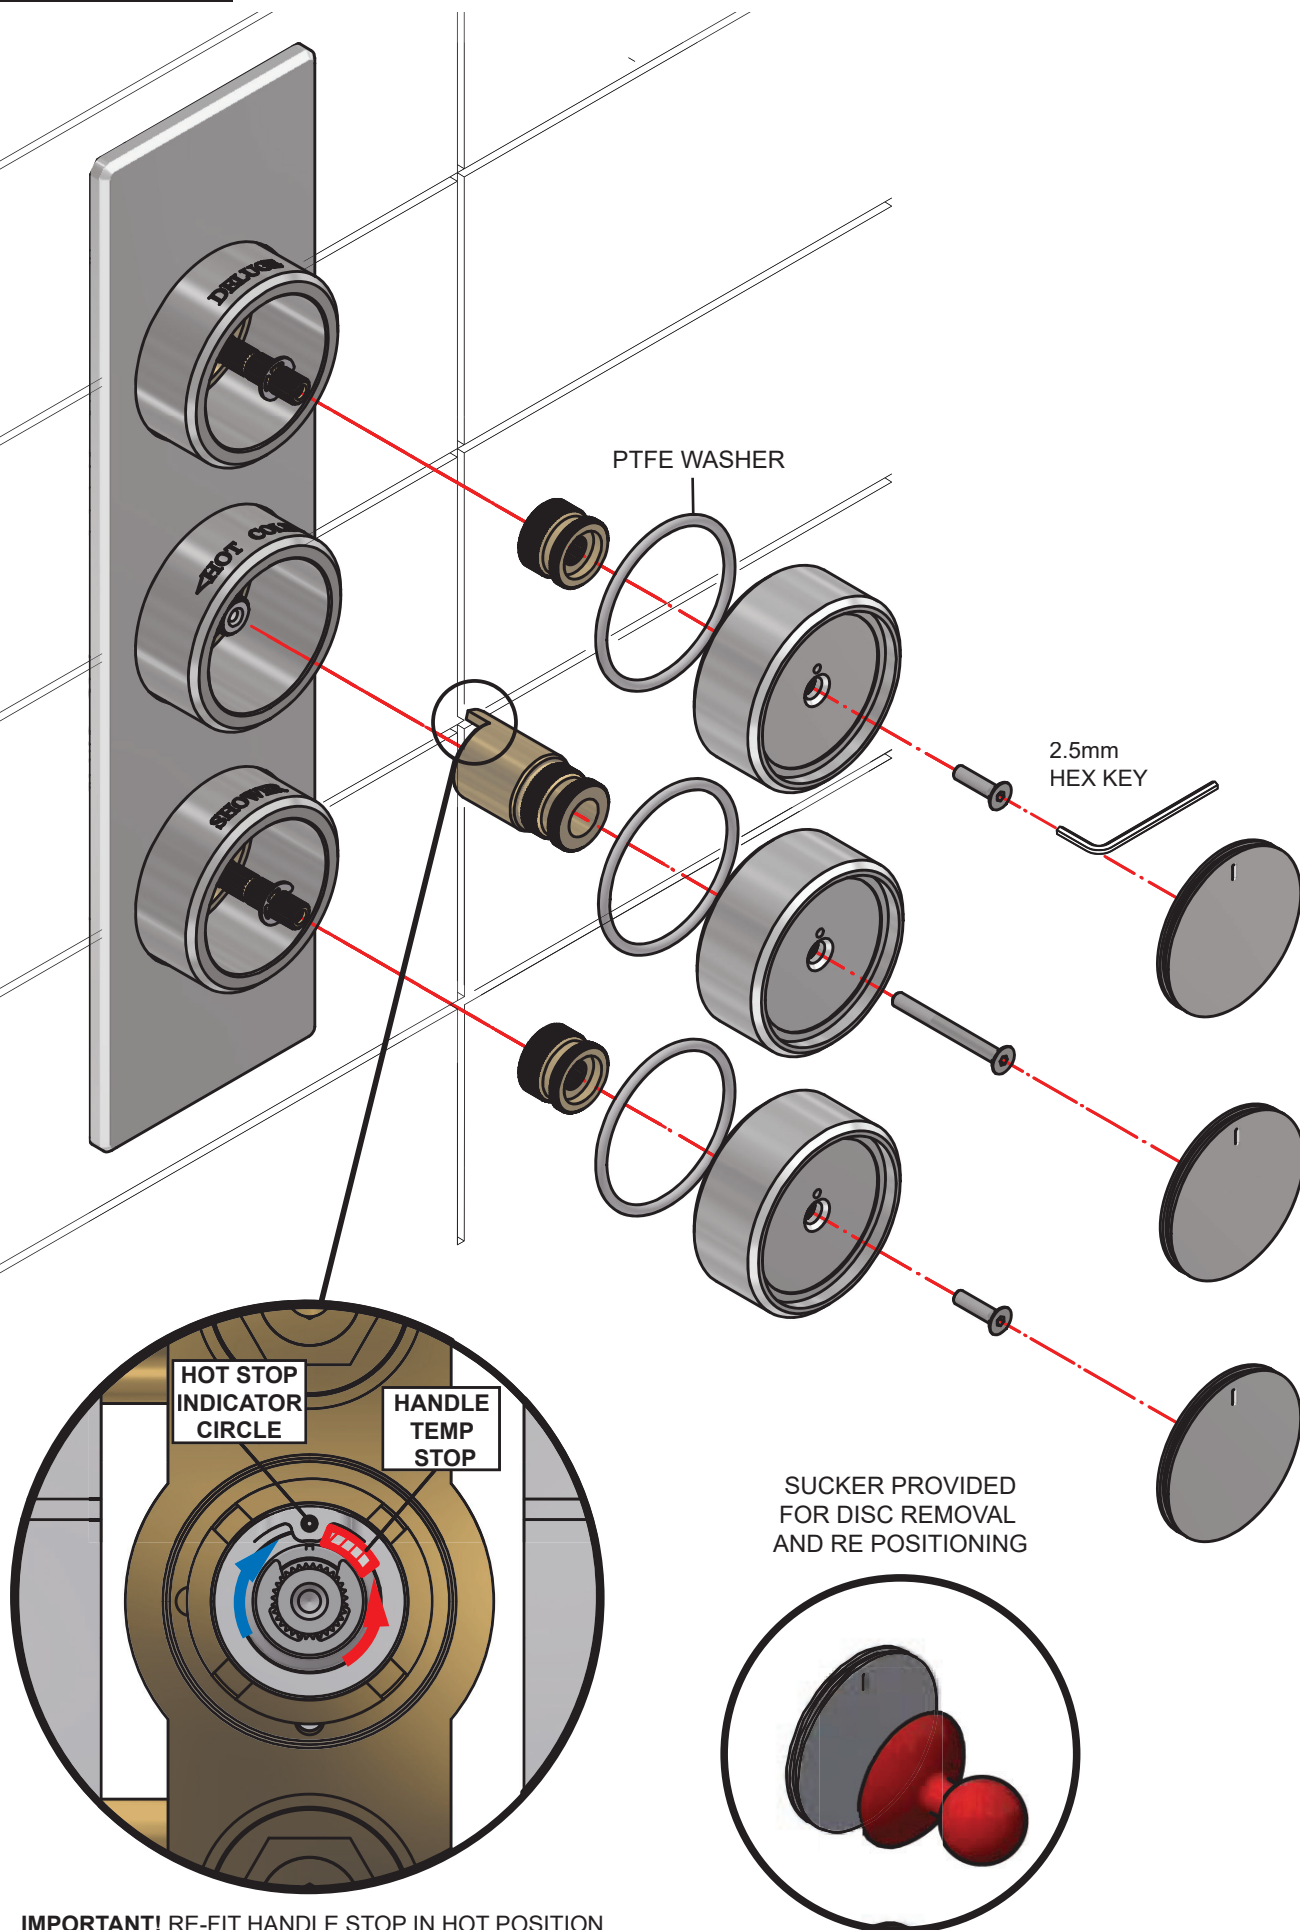

IMPORTANT! RE-FIT HANDLE STOP IN HOT POSITION
AS PRESET IN 'SETTING TEMPERATURE' STAGE

**HANDLE
CONFIGURATION**

SINGLE
CONTROLLED
THERMOSTATIC
SHOWER MIXER



8011000


DOUBLE
CONTROLLED
THERMOSTATIC
SHOWER MIXER



8021000

NOTES

PARTS LIST

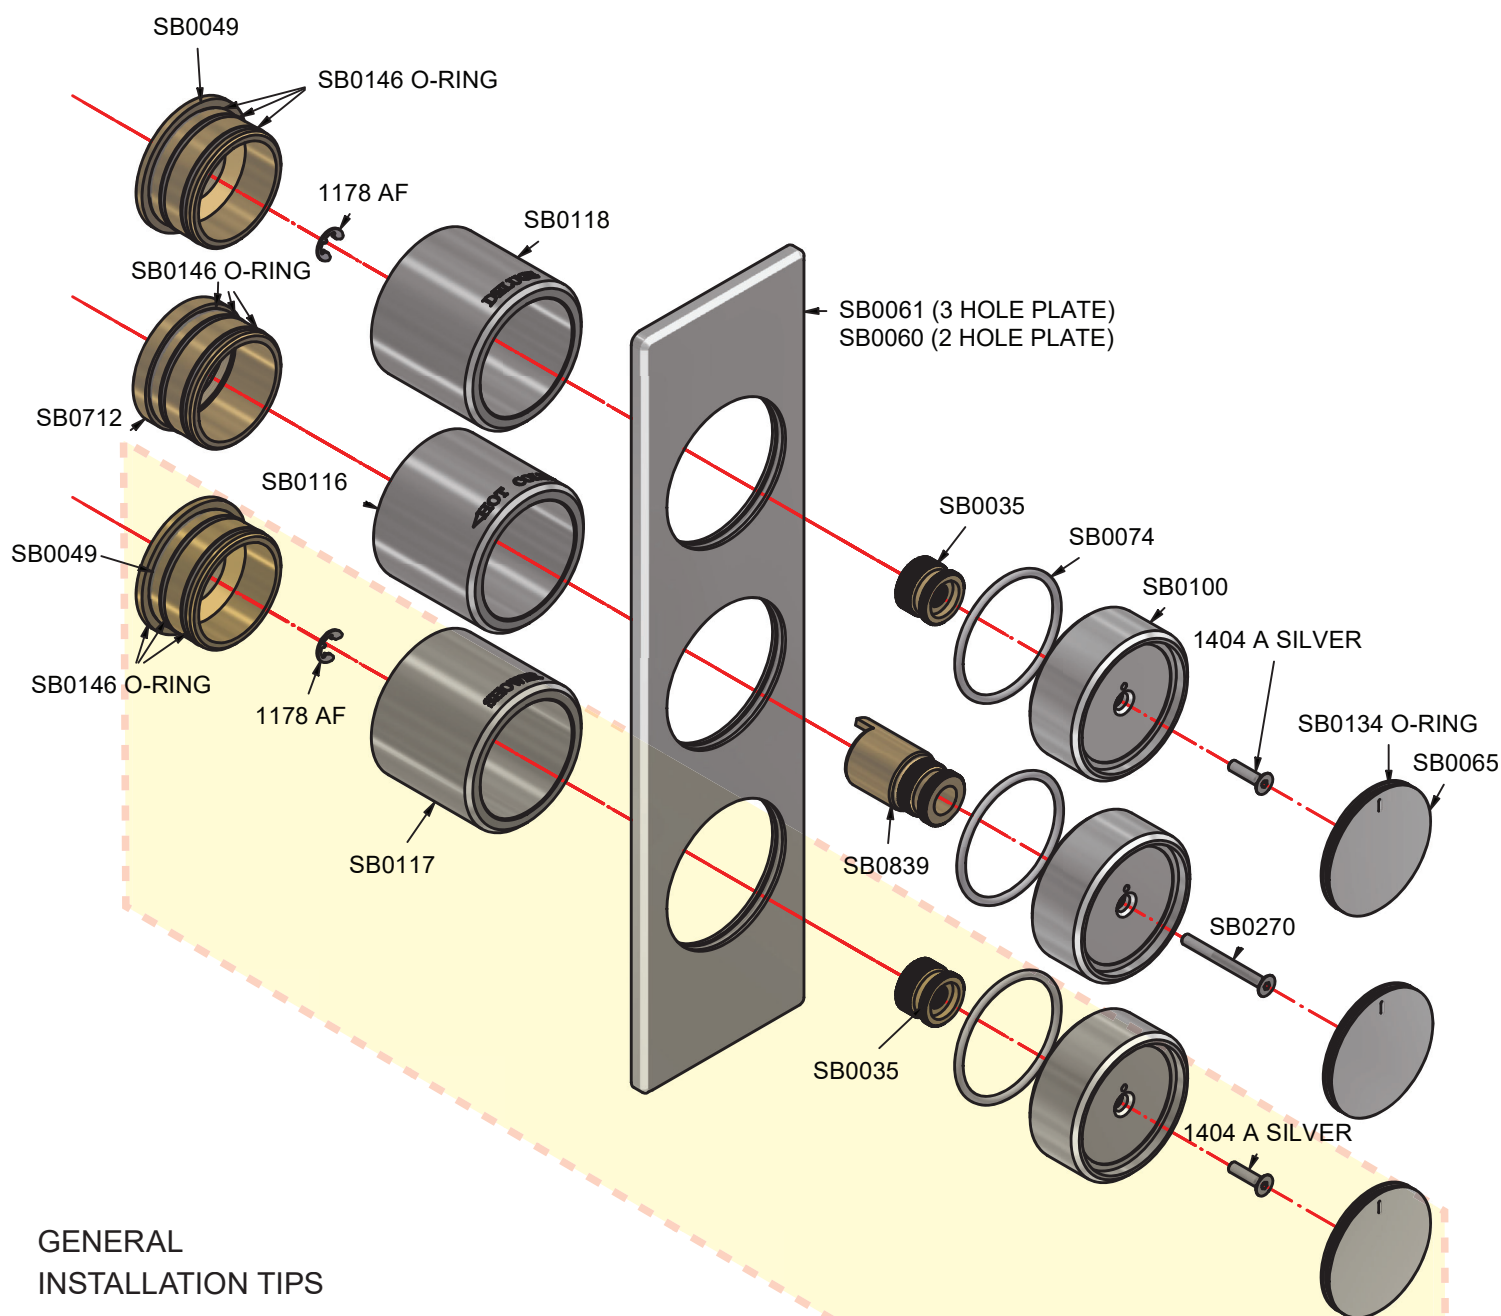

GENERAL INSTALLATION TIPS

- Handle parts carefully and consider wearing gloves for living and brushed finishes.
- Only use water or soapy water to clean visible parts.
- Where silicone is required, only use neutral cure silicone.
- Chemicals should be kept away from this product. Splashes and sometimes vapours from household cleaning fluids, marble sealers and grout haze removers can cause damage.

LOWER ON/OFF CONTROL
ONLY AVAILABLE ON
MODEL 80210000
(DOUBLE CONTROLLED MODELS)