



# SWADLING

## BRASSWARE

### INSTALLATION INSTRUCTIONS

Illustrious Triple controlled outlet  
concealed valve

90310000

|                        |                            |
|------------------------|----------------------------|
| <b>Handles Suffix</b>  | <b>XH3 Mother of Pearl</b> |
| <b>XH0 White Glass</b> | <b>XH6 Black Lip Pearl</b> |
| <b>XH2 Plain Brass</b> | <b>XH9 Black Glass</b>     |



### IMPORTANT INSTALLATION INFORMATION

- Before Installation, please check all parts against the parts list on the back page of this booklet.
- Make sure that the parts are undamaged and that their finish is as expected.
- Should you find a faulty or damaged part, please be in touch with our Customer Services Team immediately using the contact details below.
- Any claim for faulty or damaged parts will require the affected part to be returned to Swadling Brassware for inspection and testing.
- No claim for damaged parts or issues with a product finish will be accepted after the product has been installed.

Swadling Brassware, Churchward Road, Yate, Bristol, BS37 5PL, UNITED KINGDOM



**Telephone:** 01454 322888

**Email:** [techsupport@swadlingbrassware.co.uk](mailto:techsupport@swadlingbrassware.co.uk)


**[www.swadlingbrassware.co.uk](http://www.swadlingbrassware.co.uk)**

## PREPARATION

TRIPLE CONTROLLED VALVE  
9031000

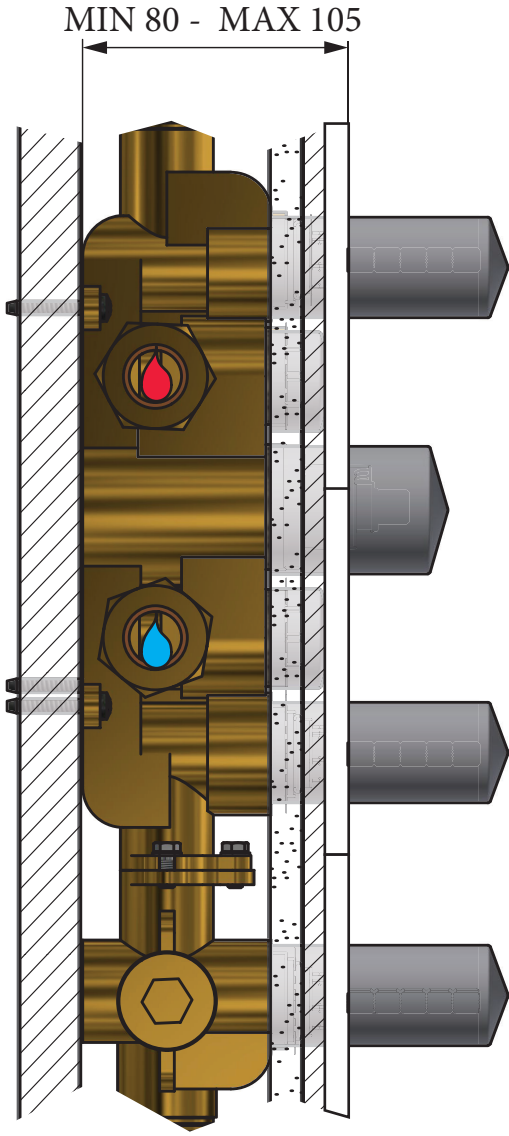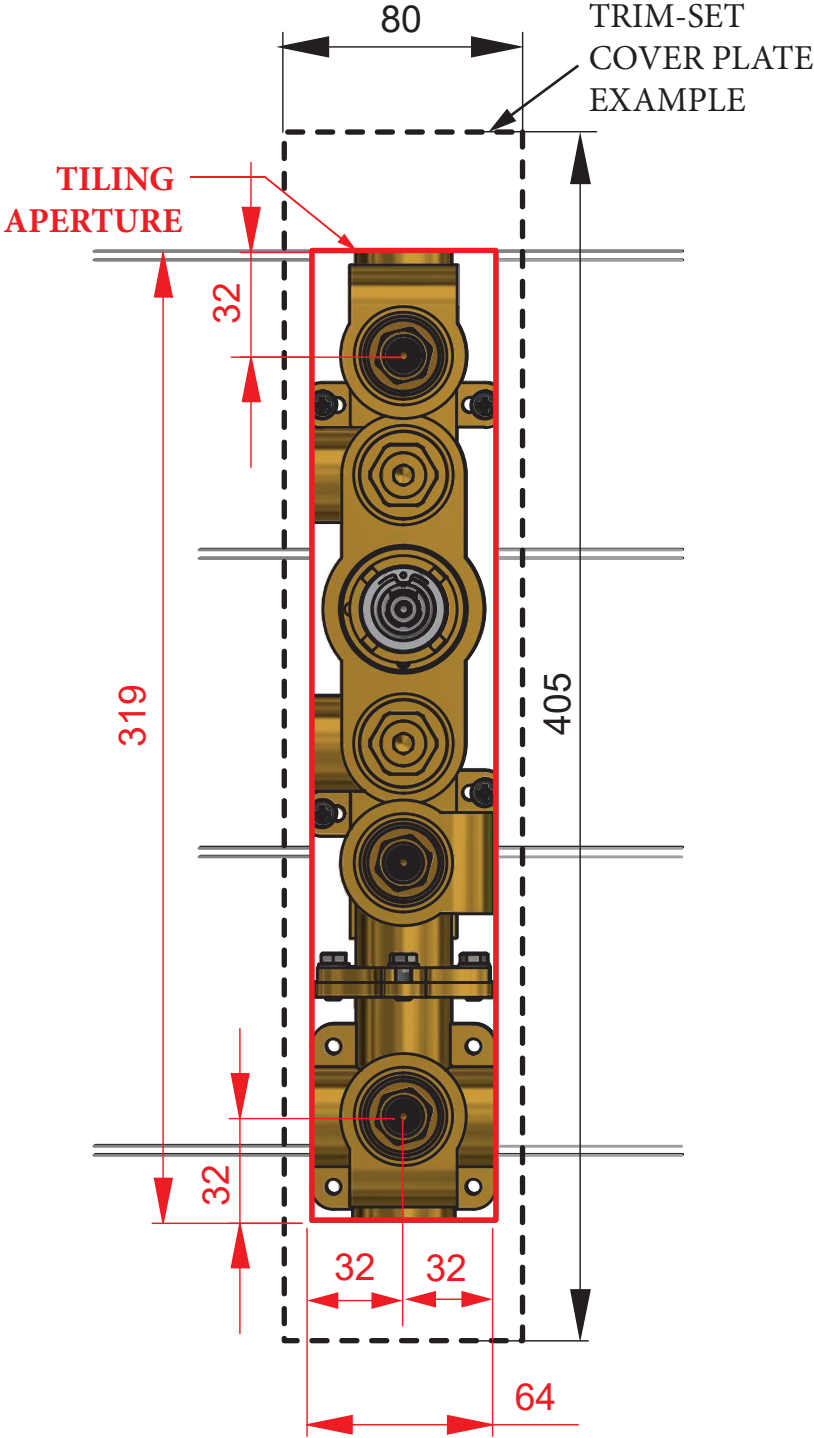

## SETTING THE TEMPERATURE

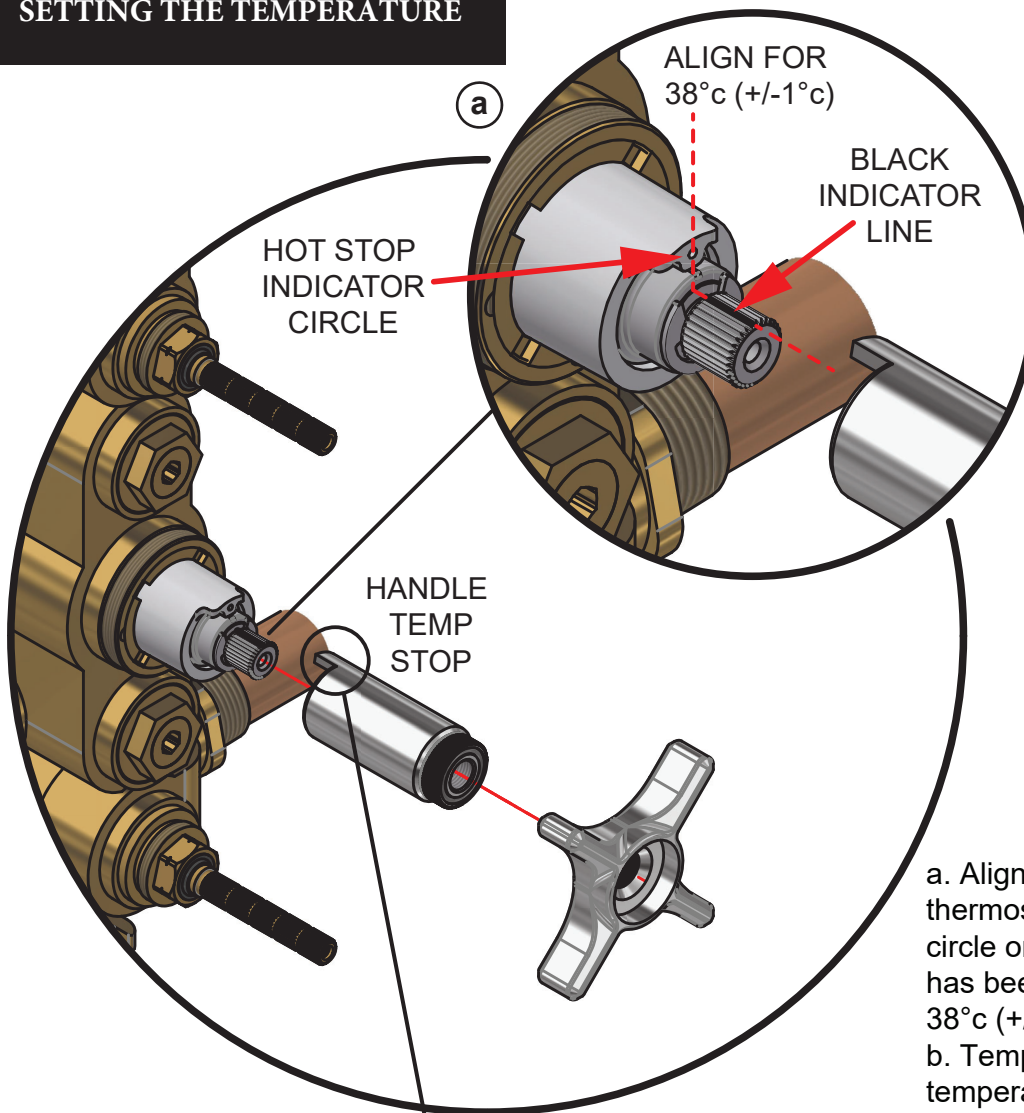

a. Align the black indicator line on the thermostatic spindle with the indicator circle on the cartridge housing. This has been factory set to achieve 38°C (+/-1°C) water temperature.


b. Temporarily assemble the temperature handle to the thermostatic cartridge making sure the handle temperature stop is against the right hand side of the thermostatic hot stop, this will be your maximum outlet temperature.

To increase the maximum outlet temperature - remove the handle assembly and re-position the handle temperature stop, rotated towards the clockwise direction by a few degrees, re-fit handle and turn back to stop position, re-test with a thermometer.

**For SAFETY REASONS the maximum temperature should not exceed 41°C.**



To decrease maximum temperature, using the handle, rotate temperature spline clockwise by a few degrees, remove the handle assembly and re-fit ensuring the handle temperature stop is against the right hand side of the thermostatic hot stop, re-test.

**Remove handle assembly ensuring it is set in the hot stop position. Set aside handle assembly ready to assemble sleeve and plate.**

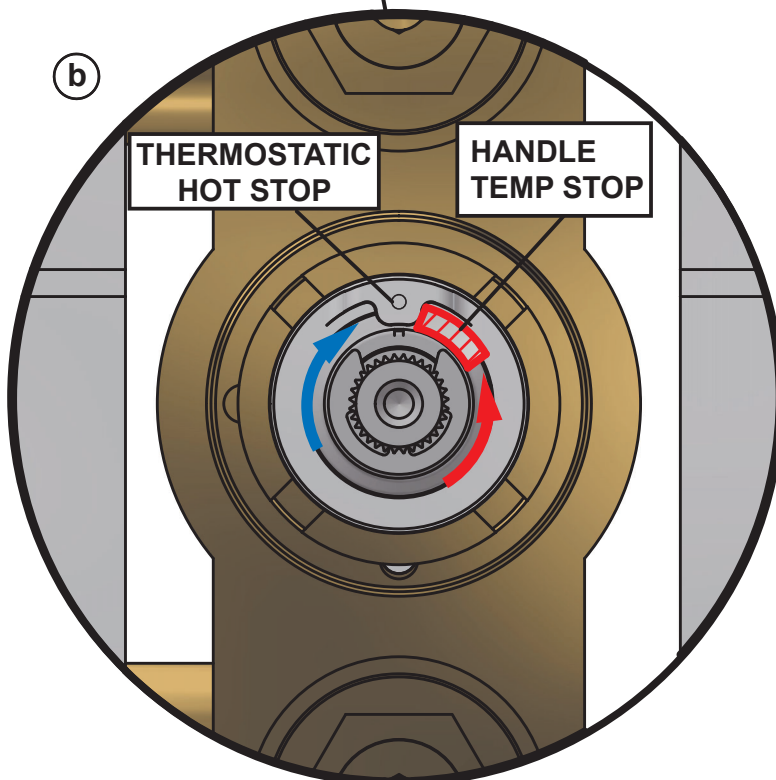

## INSTALLATION


COLLAR ENGRAVING ONLY APPLIES ON MODELS WITH MOTHER OF PEARL, BLACK LIP PEARL OR BRASS HANDLE DISCS. OTHERWISE COLLARS ARE PLAIN

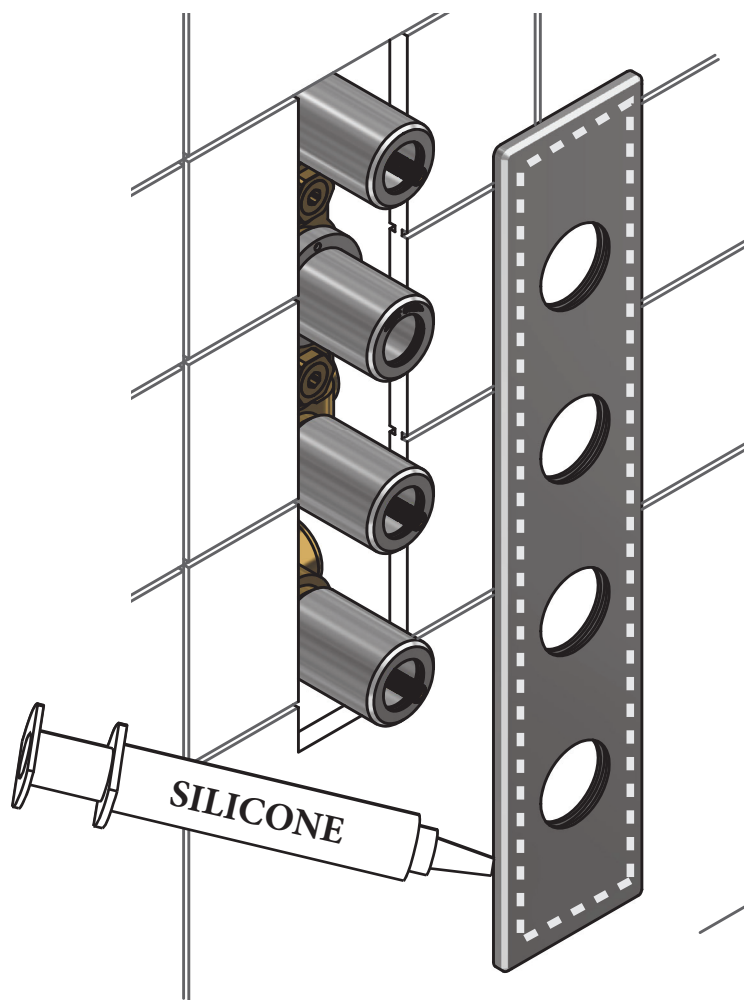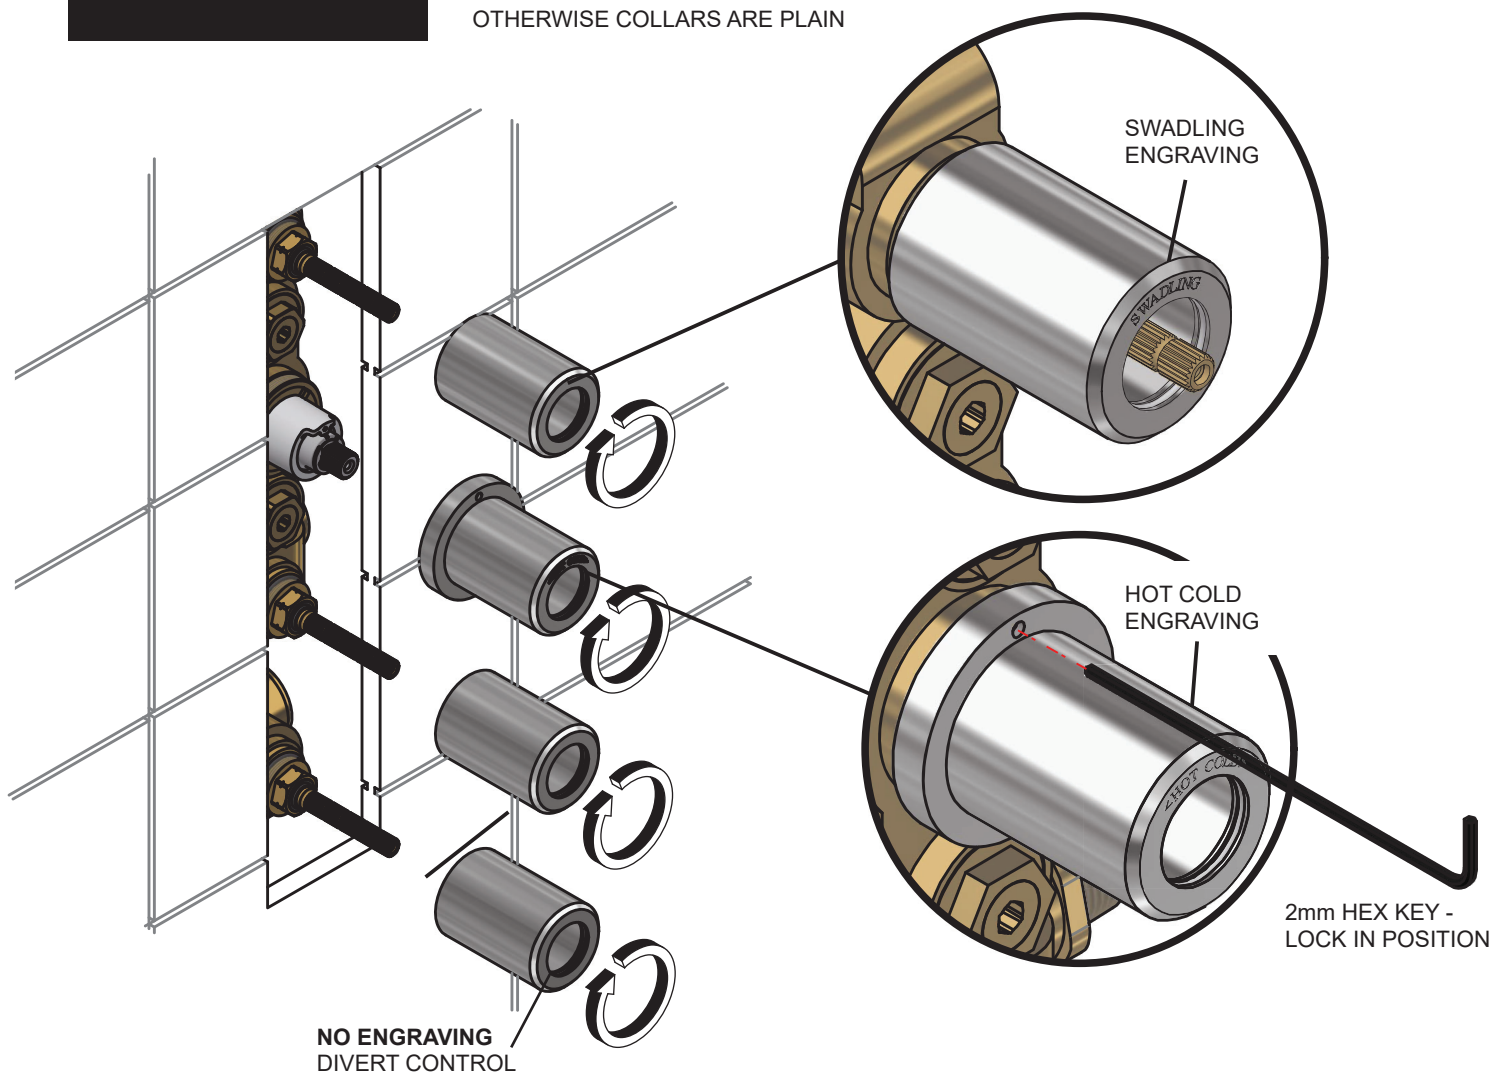



## HANDLES

MODEL SHOWN IS **9031000XH**  
CONTROL HANDLES VARY DEPENDING ON MODEL.  
SEE 'HANDLE CONFIGURATION' PAGE FOR CORRECT HANDLE POSITIONING

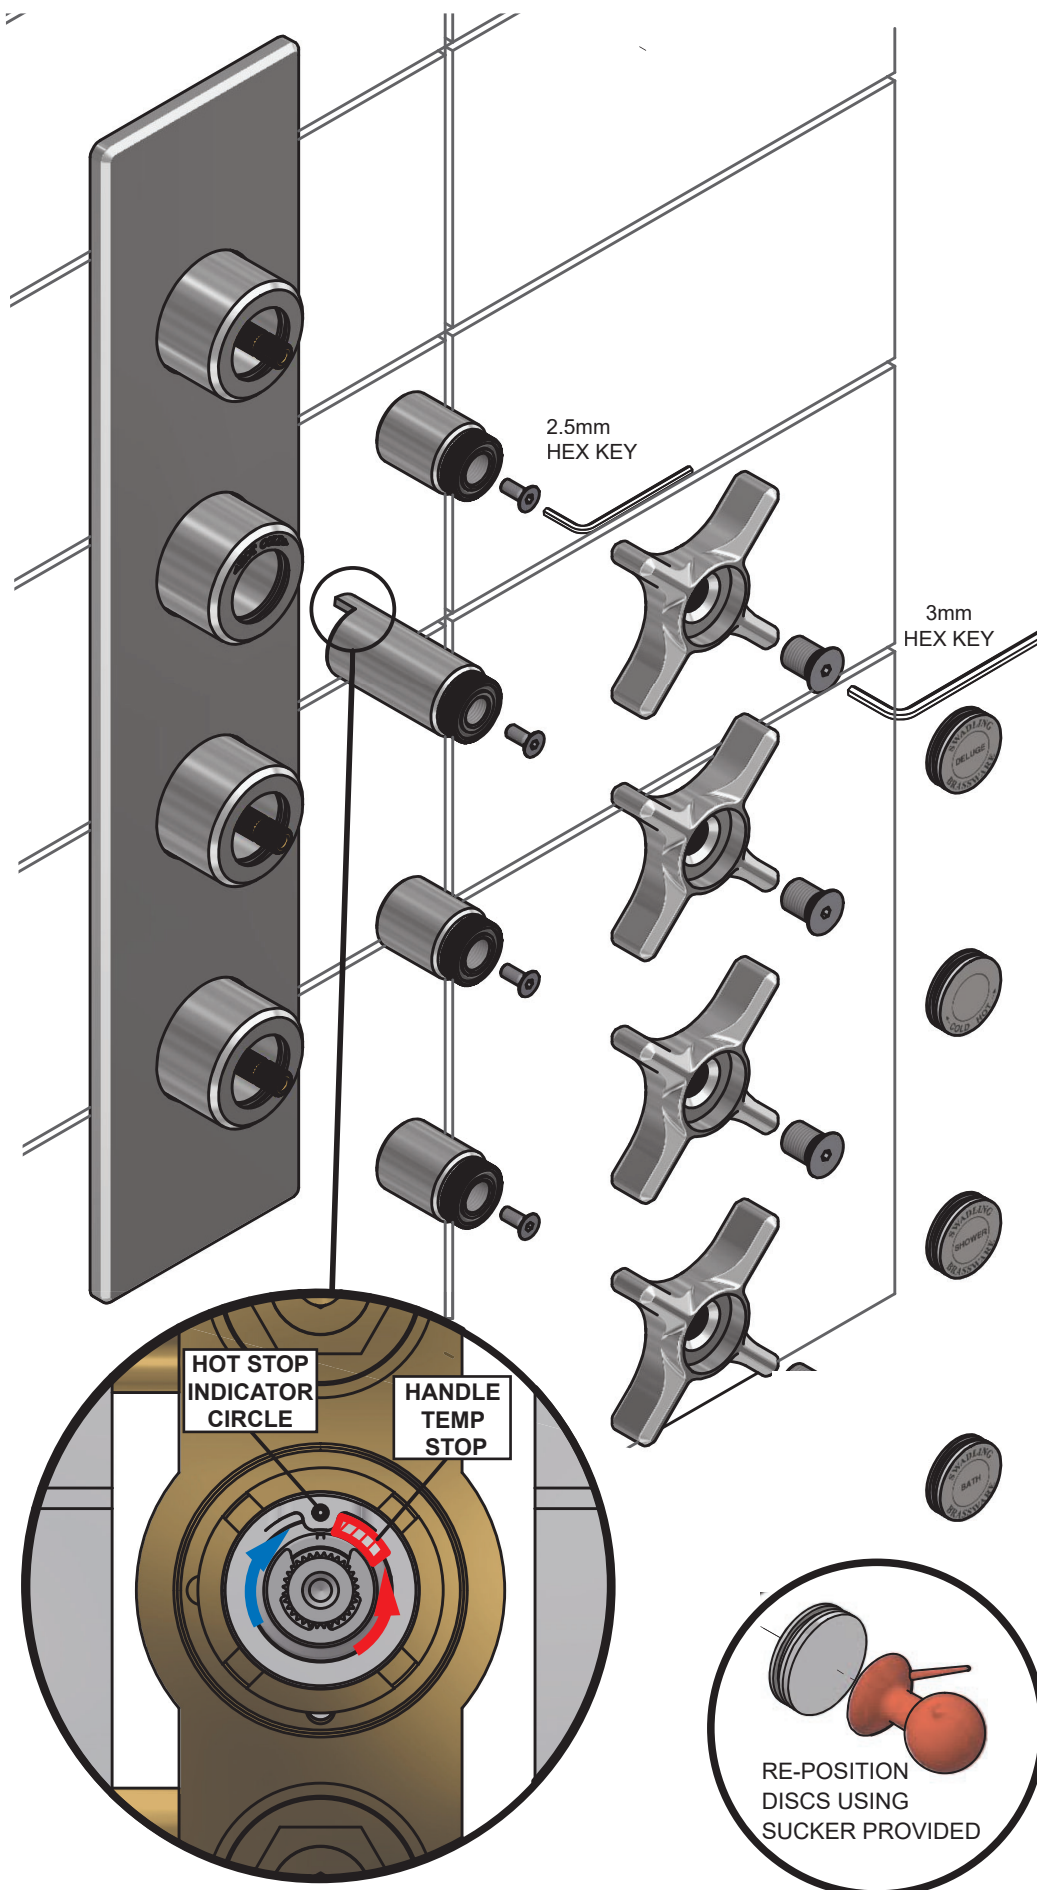

**IMPORTANT!** RE-FIT HANDLE STOP IN HOT POSITION  
AS PRESET IN 'SETTING TEMPERATURE' STAGE


HANDLE  
CONFIGURATION



9031000XH

**DISC  
CONFIGURATION**

**ALTERNATIVE  
HOT COLD  
MODELS**



**HOT COLD INSERT**

| COLOUR           | PART No. |
|------------------|----------|
| MOTHER OF PEARL* | SB0015   |
| BLACK LIP PEARL* | SB0018   |
| WHITE DISC*      | SB0002   |
| BLACK DISC*      | SB0006   |
| PLAIN BRASS      | SB0450   |

**ALTERNATIVE  
BATH  
MODELS**




**BATH INSERT**

| COLOUR        | PART No. |
|---------------|----------|
| ART DECO BATH | SB0460   |




**ALTERNATIVE  
DELUGE  
MODELS**



**DELUGE INSERT**

| COLOUR           | PART No. |
|------------------|----------|
| MOTHER OF PEARL* | SB0015   |
| BLACK LIP PEARL* | SB0018   |
| WHITE DISC*      | SB0004   |
| BLACK DISC*      | SB0008   |
| PLAIN BRASS      | SB0450   |
| ART DECO DELUGE  | SB0458   |

**ALTERNATIVE  
SHOWER  
MODELS**




**SHOWER INSERT**

| COLOUR           | PART No. |
|------------------|----------|
| MOTHER OF PEARL* | SB0015   |
| BLACK LIP PEARL* | SB0018   |
| WHITE DISC*      | SB0001   |
| BLACK DISC*      | SB0005   |
| PLAIN BRASS      | SB0450   |
| ART DECO SHOWER  | SB0459   |

## PARTS LIST

MODEL SHOWN IS **9031000XH**  
 CONTROL HANDLES VARY ON ALTERNATIVE MODELS.  
 SEE 'HANDLE CONFIGURATION' FOR HANDLE PLACEMENT

\*COLLAR ENGRAVING ONLY  
 APPLIES ON MODELS WITH  
 MOTHER OF PEARL, BLACK LIP  
 PEARL OR BRASS HANDLE DISCS.  
 OTHERWISE COLLARS ARE PLAIN

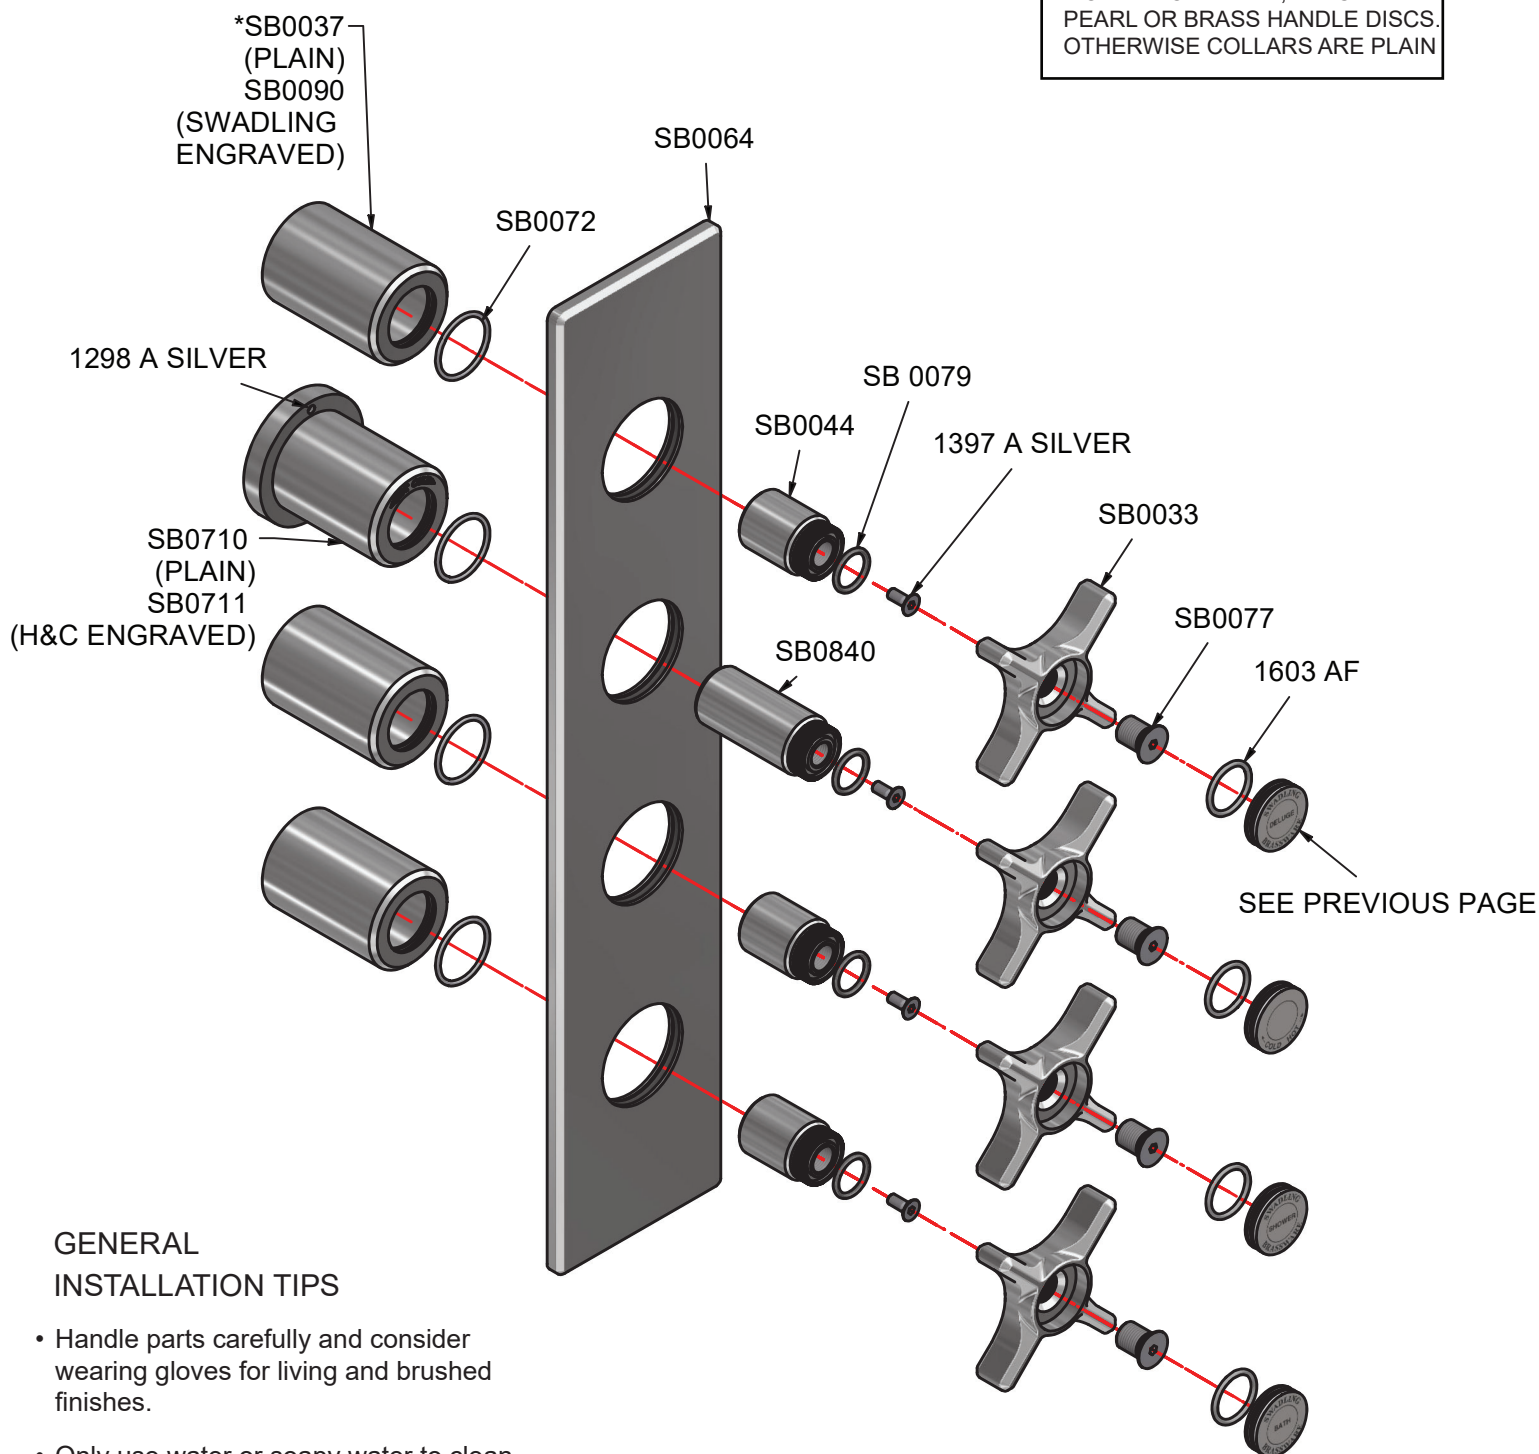

### GENERAL INSTALLATION TIPS

- Handle parts carefully and consider wearing gloves for living and brushed finishes.
- Only use water or soapy water to clean visible parts.
- Where silicone is required, only use neutral cure silicone.
- Chemicals should be kept away from this product. Splashes and sometimes vapours from household cleaning fluids, marble sealers and grout haze removers can cause damage.