


PARTS LIST

- 1 Plug assembly (Removable)
- 2 Dip tube (Removable)
- 3 Waste flange
- 4 Waste Flange seal
- 5 Rubber waste seal
- 6 Tapered rubber seal
- 7 Plastic seal
- 8 1.5" BSP nut
- 9 Trap waste body
- 10 Rubber seal
- 11 1.25" BSP compression nut
- 12 Flexible overflow pipe
- 13 Flexible inlet hose
- 14 Overflow body
- 15 Rubber overflow seal
- 16 Overflow clamp plate / Nozzle body
- 17 Overflow clamp plate screws
- 18 Key Bolts (x2)
- 19 Overflow cover
- 20 Allen Hex Key for tightening
- 21 Plastic Key for tightening

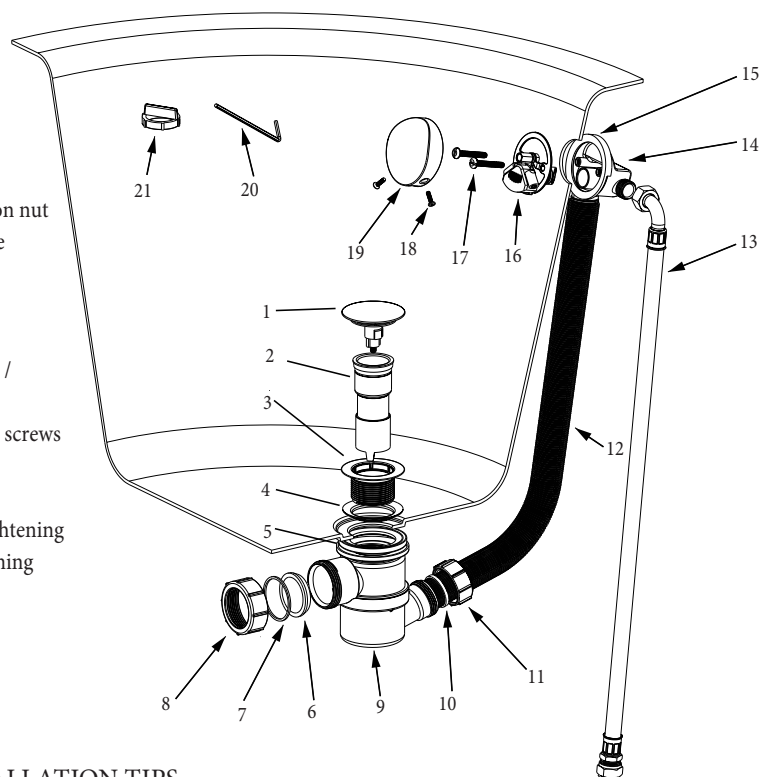

GENERAL INSTALLATION TIPS

- Handle parts carefully and consider wearing gloves for living and brushed finishes.
- Only use water or soapy water to clean visible parts.
- Where silicone is required, only use neutral cure silicone.
- Chemicals should be kept away from this product. Splashes and sometimes vapours from household cleaning fluids, marble sealers and grout haze removers can cause damage.

Swadling Brassware, Churchward Road, Yate, Bristol, BS37 5PL

Telephone: 01454 322888 **Email:** techsupport@swadlingbrassware.co.uk



SWADLING BRASSWARE

INSTALLATION INSTRUCTIONS

Bath filler with push down click waste

53800000OX

IMPORTANT INSTALLATION INFORMATION

- Before Installation, please check all parts against the parts list on the back page of this booklet.
- Make sure that the parts are undamaged and that their finish is as expected.
- Should you find a faulty or damaged part, please be in touch with our Customer Services Team immediately using the contact details below.
- Any claim for faulty or damaged parts will require the affected part to be returned to Swadling Brassware for inspection and testing.
- No claim for damaged parts or issues with a product finish will be accepted after the product has been installed.










Swadling Brassware, Churchward Road, Yate, Bristol, BS37 5PL

Telephone: 01454 322888 **Email:** techsupport@swadlingbrassware.co.uk

INSTALLATION

Flexible inlet pipe should be installed in a self-draining position.

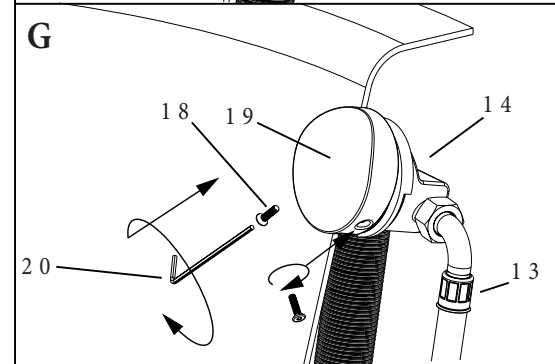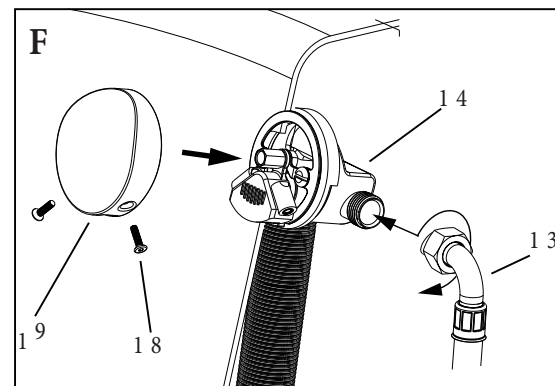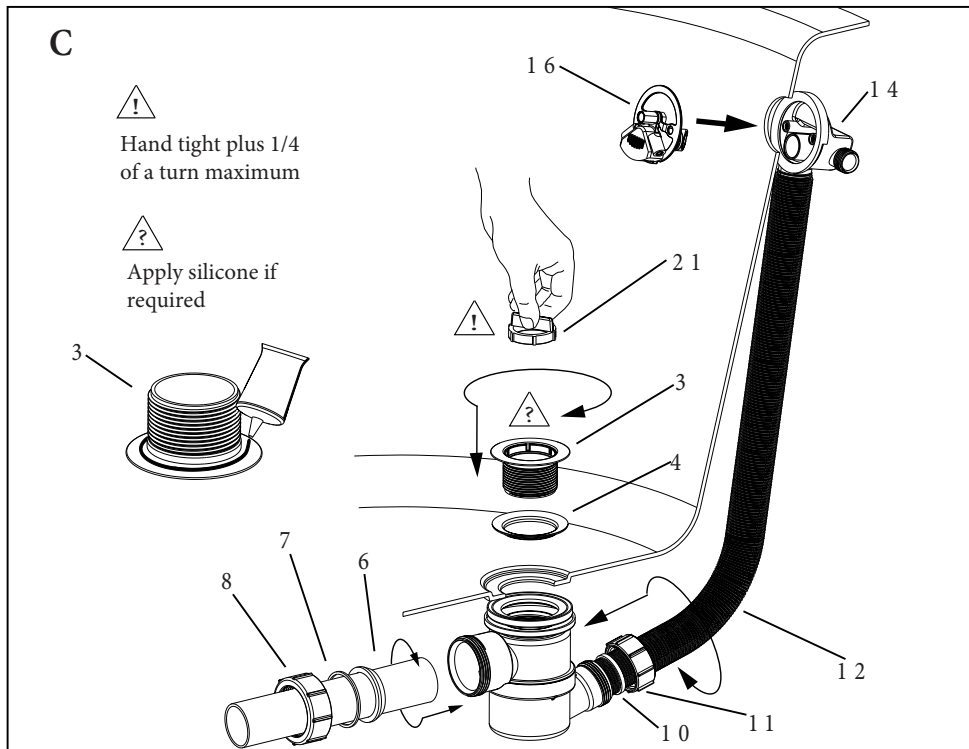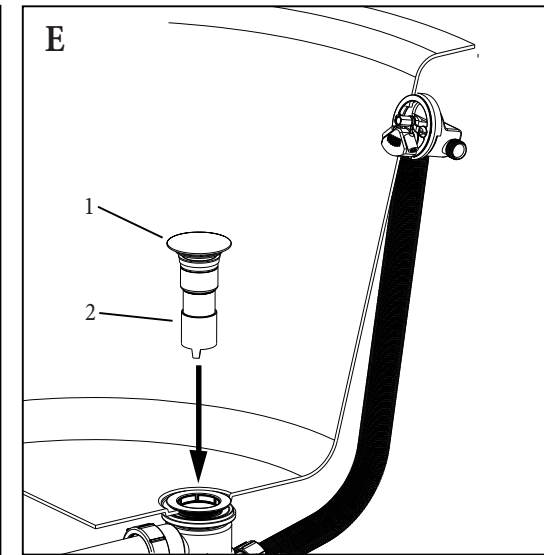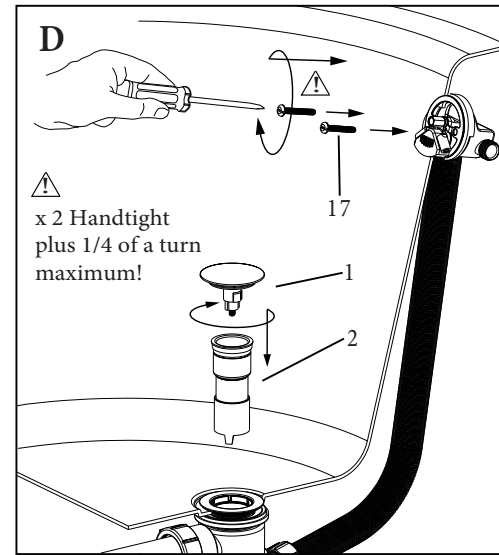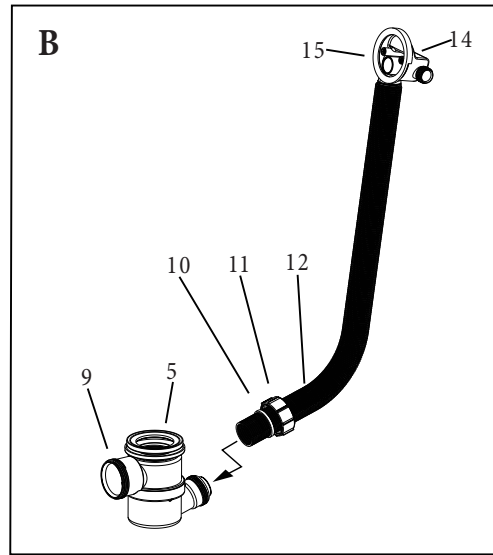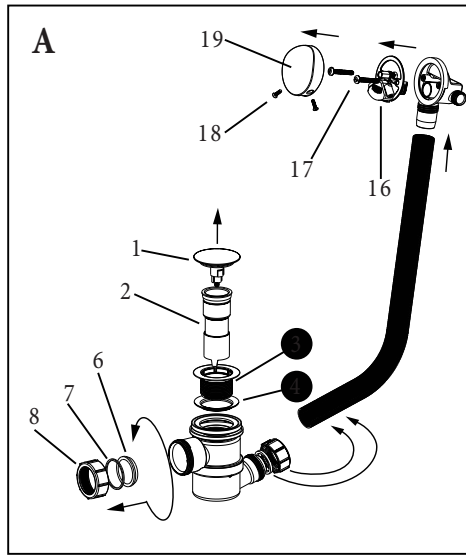

Fill Bath and check full assembly for leaks

