



SWADLING

BRASSWARE

INSTALLATION INSTRUCTIONS

Traditional bottle trap

5720000OOX



IMPORTANT INSTALLATION INFORMATION

- Before Installation, please check all parts against the parts list on the back page of this booklet.
- Make sure that the parts are undamaged and that their finish is as expected.
- Should you find a faulty or damaged part, please be in touch with our Customer Services Team immediately using the contact details below.
- Any claim for faulty or damaged parts will require the affected part to be returned to Swadling Brassware for inspection and testing.
- No claim for damaged parts or issues with a product finish will be accepted after the product has been installed.


Swadling Brassware, Churchward Road, Yate, Bristol, BS37 5PL

Telephone: 01454 322888 **Email:** techsupport@swadlingbrassware.co.uk

Swadling Brassware, Churchward Road, Yate, Bristol, BS37 5PL

Telephone: 01454 322888 **Email:** techsupport@swadlingbrassware.co.uk

INSTALLATION

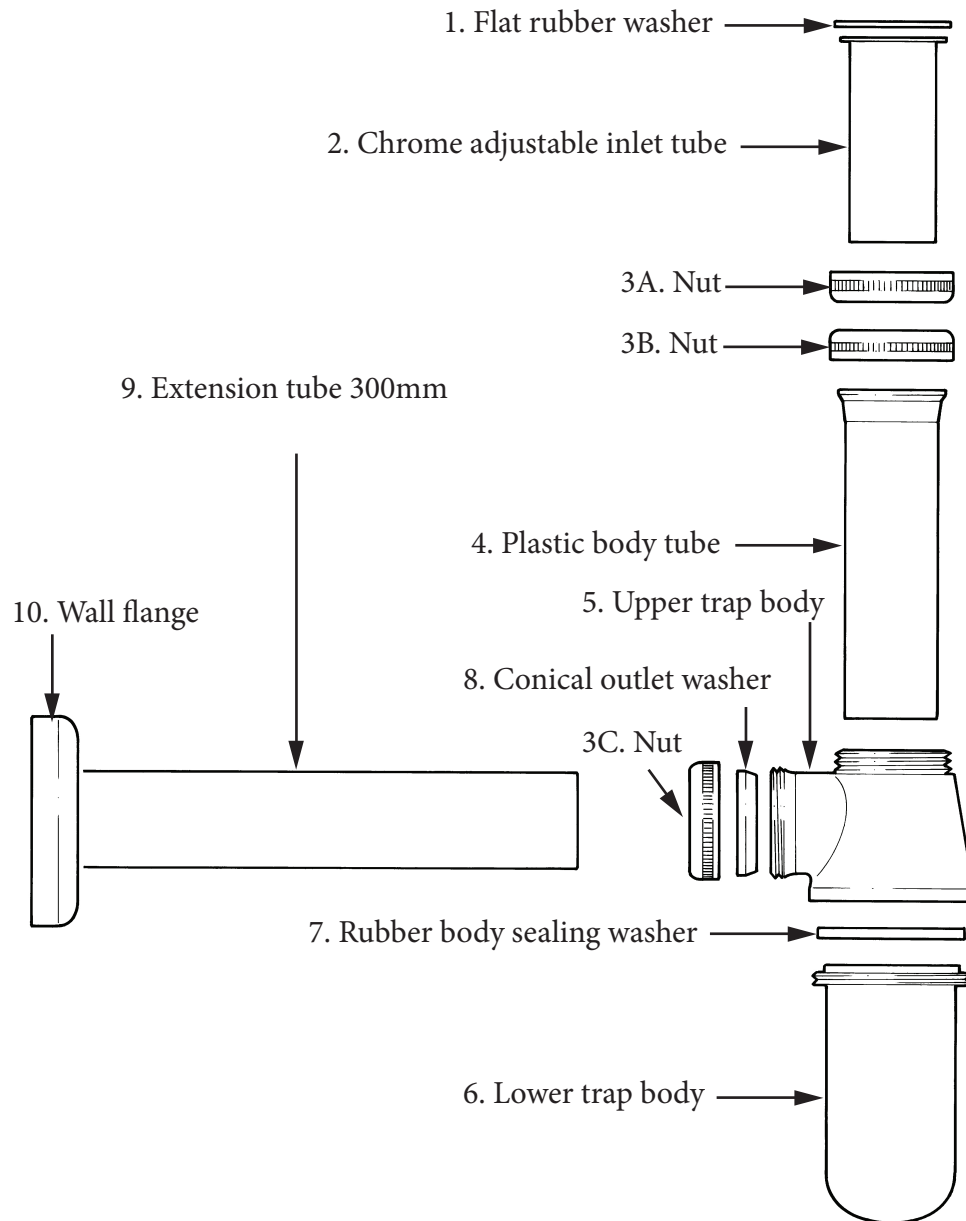

- A) Check all components are present and familiarize yourself with them.
- B) Fit the rubber body sealing washer (7) or check that it is in place.
- C) Fit the rubber washer (1) and assemble to the waste outlet with chrome nut (3A).
- D) The height of the waste outlet can be varied by approx. 110mm to line up with the position of the waste pipe. This is achieved by loosening the nut (3B) which then allows the adjustable inlet tube to move freely. After adjustment, re-tighten the nut (3B).
- E) Remove the nut (3C) and position this along the body of the extension tube (9) along with the conical outlet washer (8). Fit this assembly fully into the upper trap body (5) and tighten the nut (3C). The trap outlet will accept 35mm (1 ¼" trap) and 42mm (1 ½" trap) O.D. pipes. The standard UK specification plastic waste pipe will not fit into this outlet
- F) Fit the wall flange (10) to the extension tube (9).
- G) The extension tube can easily be connected to the main waste pipe by using a 1 ¼" or 1 ½" multi-fit plastic connector (compression type). This is not supplied with this bottle trap.
- H) Finally, when all connections have been made, check that all joints are watertight.

GENERAL INSTALLATION TIPS

- Handle parts carefully and consider wearing gloves for living and brushed finishes.
- Only use water or soapy water to clean visible parts.
- Where silicone is required, only use neutral cure silicone.
- Chemicals should be kept away from this product. Splashes and sometimes vapours from household cleaning fluids, marble sealers and grout haze removers can cause damage.