

SWADLING
BRASSWARE



INSTALLATION INSTRUCTIONS

Cable-controlled Bath Waste with Overflow

5800000OOX


**IMPORTANT INSTALLATION
INFORMATION**

- Before Installation, please check all parts against the parts list on the back page of this booklet.
- Make sure that the parts are undamaged and that their finish is as expected.
- Should you find a faulty or damaged part, please be in touch with our Customer Services Team immediately using the contact details below.
- Any claim for faulty or damaged parts will require the affected part to be returned to Swadling Brassware for inspection and testing.
- No claim for damaged parts or issues with a product finish will be accepted after the product has been installed.

Swadling Brassware, Churchward Road, Yate, Bristol, BS37 5PL
Telephone: 01454 322888 **Email:** techsupport@swadlingbrassware.co.uk

Swadling Brassware, Churchward Road, Yate, Bristol, BS37 5PL
Telephone: 01454 322888 **Email:** techsupport@swadlingbrassware.co.uk

INSTALLATION

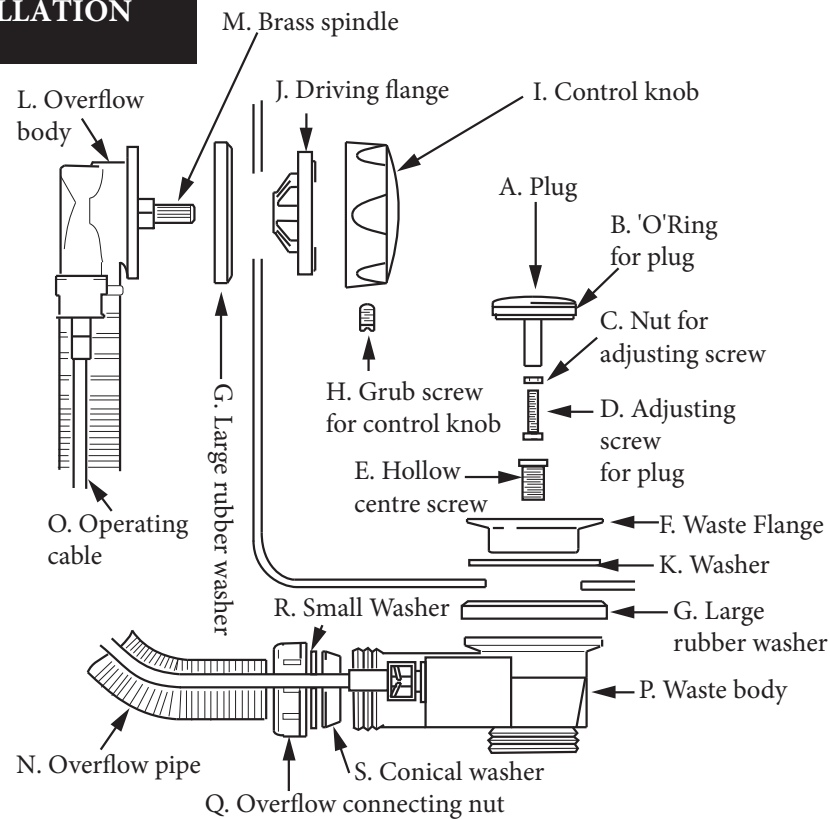

- 1) Check and familiarise yourself with all of the components.
- 2) Offer up the main body of the pop up waste (items L, O and P) to the bath, ensure both washers (item G) are in place.
- 3) Secure the overflow body, assemble the driving flange (item J) to the overflow body (item L). Before tightening this centralise the assembly into the centre of the bath overflow hole. Do not over-tighten or use excessive pressure.
- 4) Secure the waste outlet, apply silicon sealant to the area around the waste outlet hole in the bath, then place into position the foam washer (item K) and the waste flange (item F). Fit and tighten the hollow centre screw (item E). Take care not to damage the plated finish and do not over-tighten. Check that the operating cable (item O) is not bent or kinked and has some free movement.

- 5) The plain end of the overflow pipe (item N) fits to the overflow body (item L), this is a push on connection. The corrugated end of the overflow pipe fits to the waste body (item P). To make this connection assemble the connecting nut (item Q), the small washer (item R) and the conical washer (item S) onto the overflow pipe. Fully insert the overflow pipe into the connection on the waste body and tighten connecting nut.
- 6) Take the control knob (item I) and ensure the grub screw (item H) is fitted into this. Fit the control knob onto the brass spindle (item M) with the access hole in the control knob at the bottom. Tighten the grub screw, through the access hole.
- 7) Assemble the pop up plug, fit the nut (item C) onto the adjusting screw (item D) and fit this to the stem of the plug (item A). Fit the 'O'ring (item B) to the plug. Turn the control knob so that the operating lever is in the closed position. The operating lever is part of the waste body (item P) and is located just below the grid section. To be in the closed position the lever should be in its lowered position. Set the adjusting screw in the plug so that it is almost touching the operating lever. Operate the control knob to check that the plug 'pops up' sufficiently to allow the water to be drained from the bath. Tighten the nut (item C).
- 8) Fill the bath with water and check all joints to ensure there are no leaks. This is best done in stages starting with a small amount of water before fully filling the bath.

GENERAL INSTALLATION TIPS

- Handle parts carefully and consider wearing gloves for living and brushed finishes.
- Only use water or soapy water to clean visible parts.
- Where silicone is required, only use neutral cure silicone.
- Chemicals should be kept away from this product. Splashes and sometimes vapours from household cleaning fluids, marble sealers and grout haze removers can cause damage.