


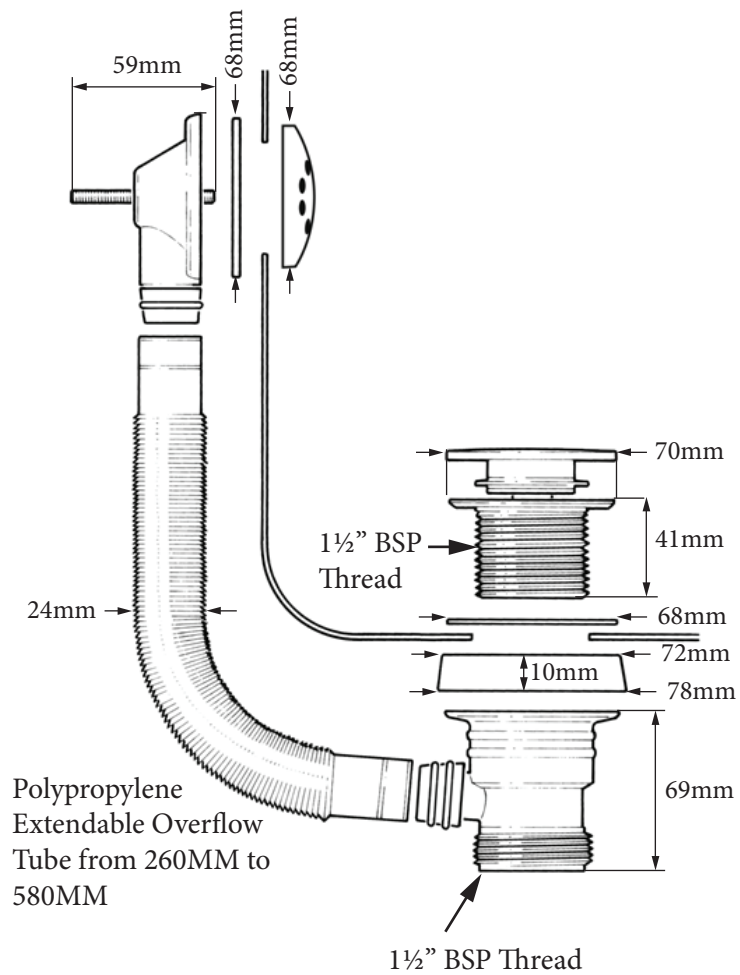

Swadling Brassware, Churchward Road, Yate, Bristol, BS37 5PL
Telephone: 01454 322888 **Email:** techsupport@swadlingbrassware.co.uk

SWADLING BRASSWARE

INSTALLATION INSTRUCTIONS

Push Down Bath Waste with Overflow

5810000OOX


IMPORTANT INSTALLATION INFORMATION

- Before Installation, please check all parts against the parts list on the back page of this booklet.
- Make sure that the parts are undamaged and that their finish is as expected.
- Should you find a faulty or damaged part, please be in touch with our Customer Services Team immediately using the contact details below.
- Any claim for faulty or damaged parts will require the affected part to be returned to Swadling Brassware for inspection and testing.
- No claim for damaged parts or issues with a product finish will be accepted after the product has been installed.



Swadling Brassware, Churchward Road, Yate, Bristol, BS37 5PL
Telephone: 01454 322888 **Email:** techsupport@swadlingbrassware.co.uk

INSTALLATION

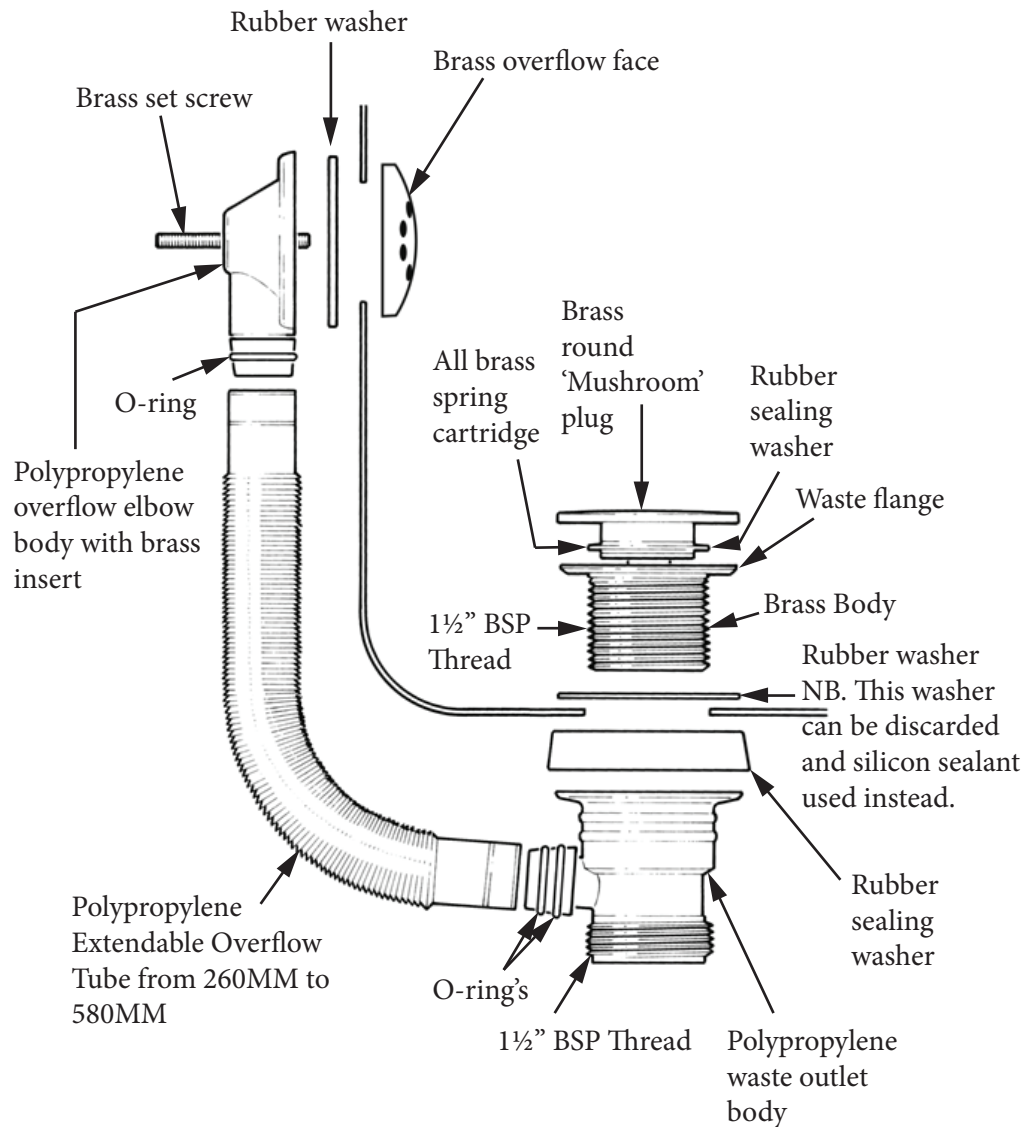

- Assemble components as shown on the drawing.
- If the bath has a rough or coarse finish on the back or underside at the area of sealing for the washers, it may be necessary to use a silicon sealant to achieve a watertight seal.
- A watertight seal must be made on the inside of the bath, that is between the underside of the waste flange and the bath. This can be achieved by using the washer or alternatively this can be discarded and a seal made by using silicon sealant.
- On completion of installation fill the bath with water and carefully check there are no leaks.

GENERAL INSTALLATION TIPS

- Handle parts carefully and consider wearing gloves for living and brushed finishes.
- Only use water or soapy water to clean visible parts.
- Where silicone is required, only use neutral cure silicone.
- Chemicals should be kept away from this product. Splashes and sometimes vapours from household cleaning fluids, marble sealers and grout haze removers can cause damage.