




SWADLING

BRASSWARE

Illustrious Toilet Roll Holder Installation Instructions 9890000OOX

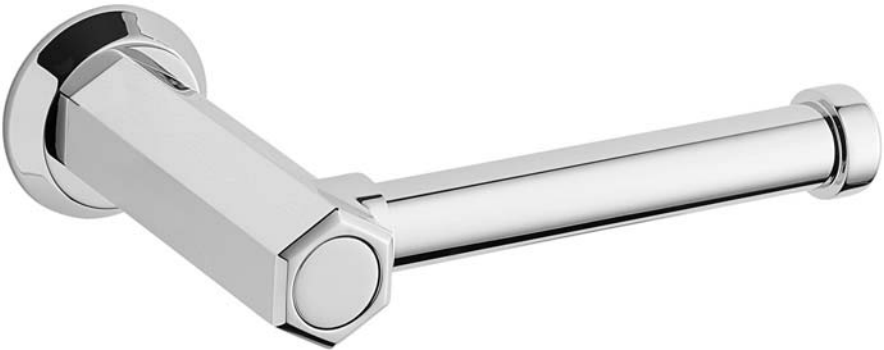

Important Installation Information

Before Installation, please check all parts against the parts list on the back page of this booklet.

Make sure that the parts are undamaged and that their finish is as expected.

Should you find a faulty or damaged part, please be in touch with our Customer Services Team immediately using the contact details below.

Any claim for faulty or damaged parts will require the affected part to be returned to Swadling Brassware for inspection and testing.




No claim for damaged parts or issues with a product finish will be accepted after the product has been installed.

Swadling Brassware, Churchward Road, Yate, Bristol, BS37 5PL

Telephone: 01454 322888 Email: techsupport@swadlingbrassware.co.uk



DIMENSIONS

It is strongly recommended that the product be fixed to a solid masonry wall or suitable timber stud work grade C16/C24 in the area behind the fixings. Ensure suitable wall plugs are selected according to the material you are fixing into and also suitable for the weight of load they are supporting. In the event that the product is fixed to Plasterboard or similar wall surfaces, utilize wall anchors to ensure your mounting brackets will hold the weight securely.

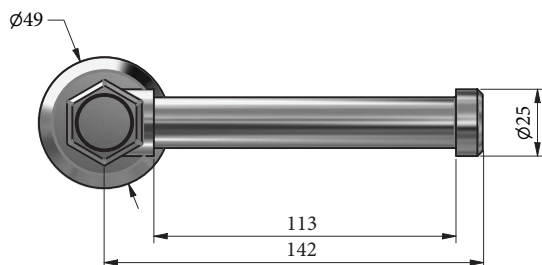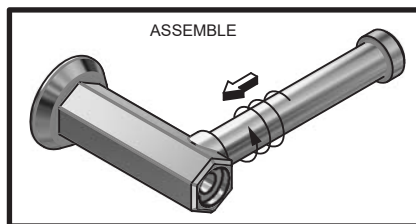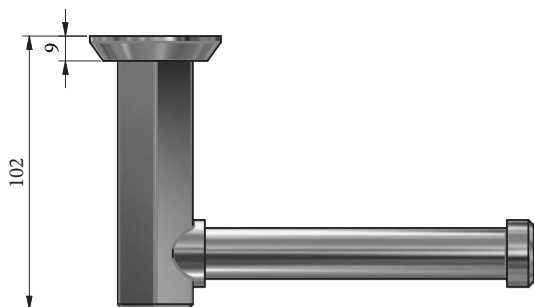


INSTALLATION

CAN BE MOUNTED EITHER
LH/RH ORIENTATION

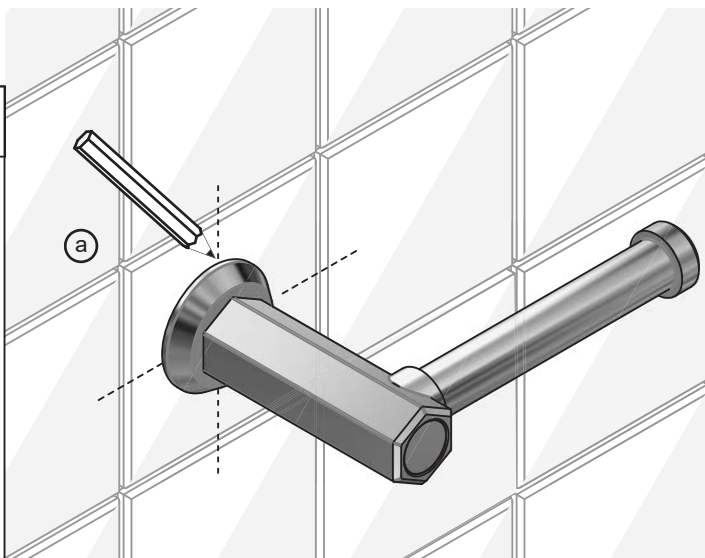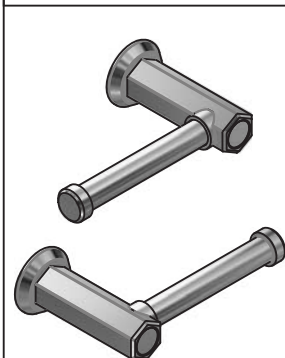


INSTALLATION


(b)

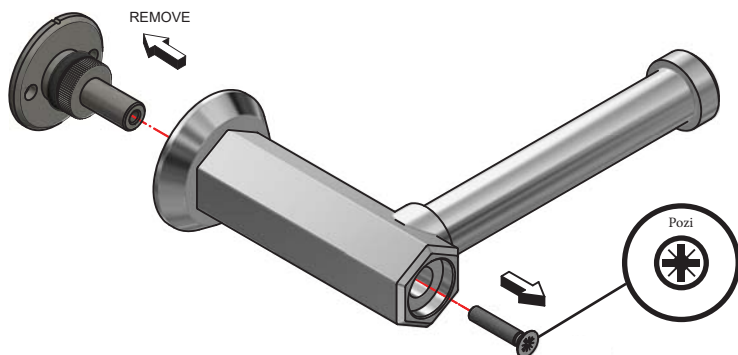


(c)

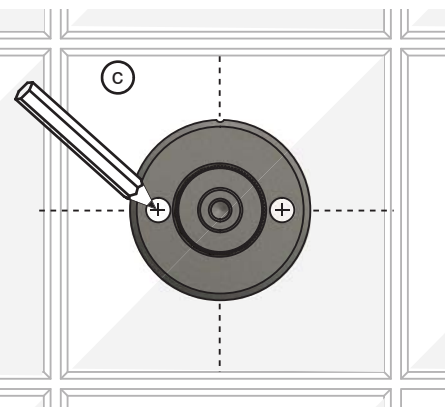


(d)

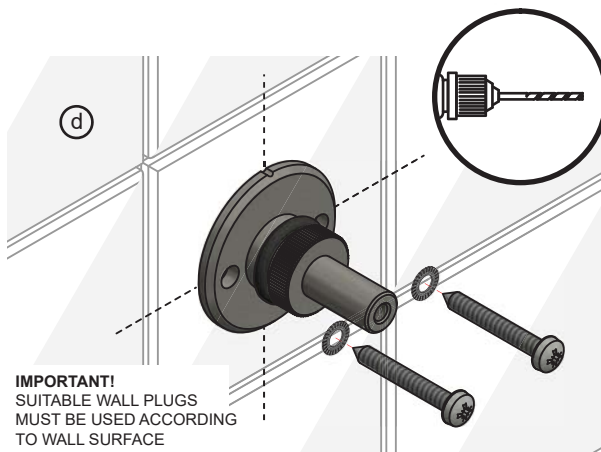

(e)

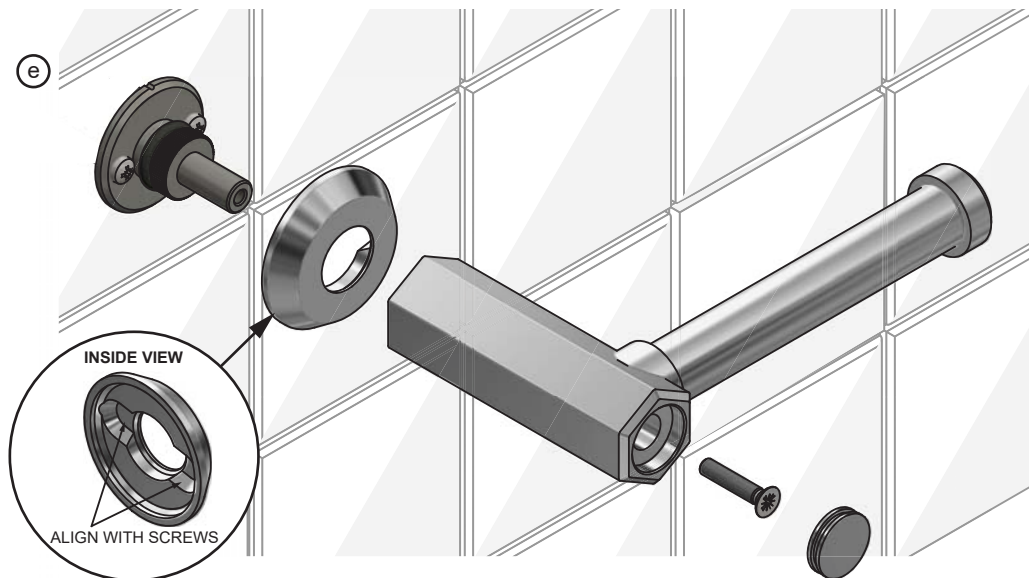

PARTS LIST

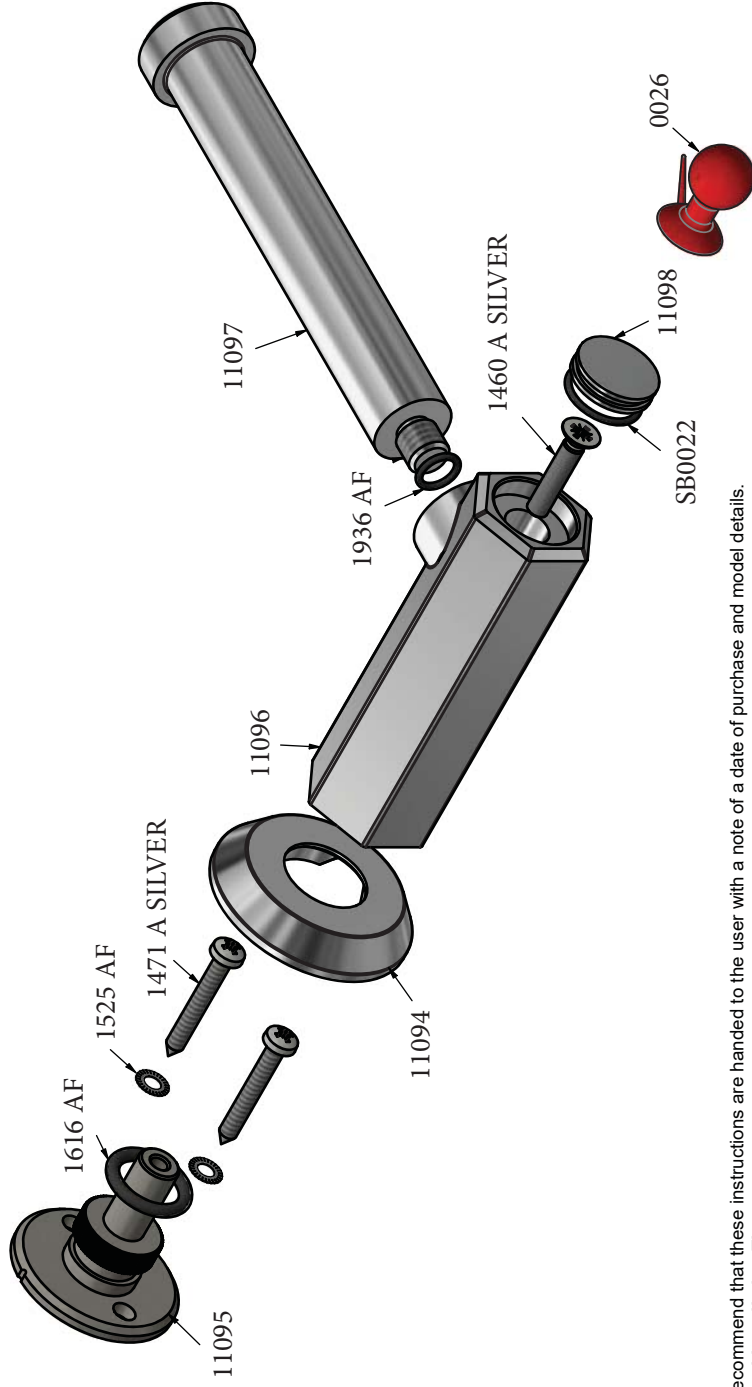

We recommend that these instructions are handed to the user with a note of a date of purchase and model details.

General Installation Tips:

Handle parts carefully and consider wearing gloves for living and brushed finishes. Only use water or soapy water to clean visible parts. Where silicone is required, only use neutral cure silicone. Chemicals should be kept away from this product. Splashes and sometimes vapours from household cleaning fluids, marble sealers and grout haze removers can cause damage.