



SWADLING

BRASSWARE

INSTALLATION INSTRUCTIONS

Modern bottle trap

5730000OOX



IMPORTANT INSTALLATION INFORMATION

- Before Installation, please check all parts against the parts list on the back page of this booklet.
- Make sure that the parts are undamaged and that their finish is as expected.
- Should you find a faulty or damaged part, please be in touch with our Customer Services Team immediately using the contact details below.
- Any claim for faulty or damaged parts will require the affected part to be returned to Swadling Brassware for inspection and testing.
- No claim for damaged parts or issues with a product finish will be accepted after the product has been installed.


Swadling Brassware, Churchward Road, Yate, Bristol, BS37 5PL

Telephone: 01454 322888 **Email:** techsupport@swadlingbrassware.co.uk

Swadling Brassware, Churchward Road, Yate, Bristol, BS37 5PL

Telephone: 01454 322888 **Email:** techsupport@swadlingbrassware.co.uk

INSTALLATION

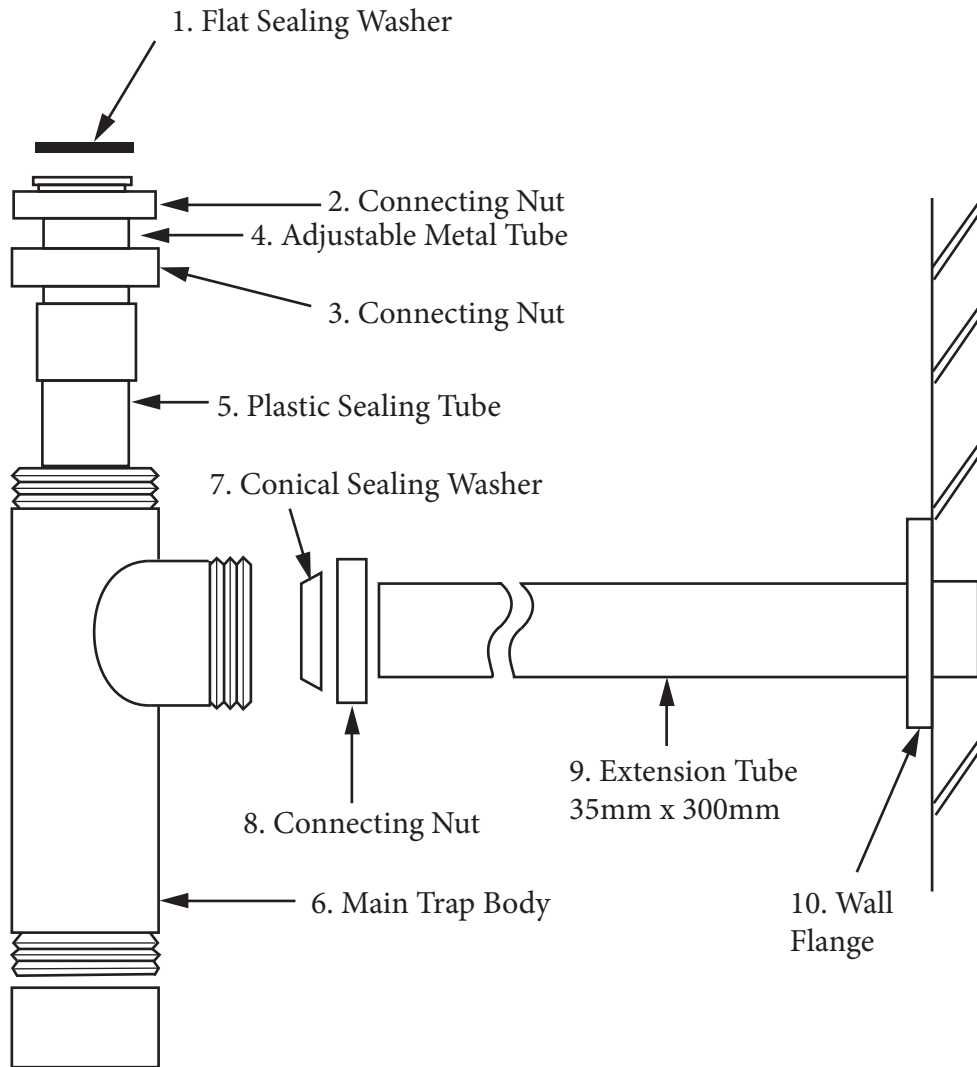

This bottle trap is supplied fully assembled, check all components shown on the drawing are present.

1. Before commencing installation, loosen the connecting nut (3) to enable free movement of the adjustable inlet metal tube (4)
2. Ensure the flat sealing washer (1) is fitted into the connecting nut (2). Fit the trap to the waste outlet.
3. Fit the connecting nut (8) and the conical washer (7) to the extension tube (9).
4. Fit wall flange (10) to the extension tube (9) and position as required. Connect to the waste outlet pipe. The best method of connecting to the waste outlet pipe is by using a 1¼" plastic multi-fit connector - compression type. This connector is not supplied with this set.
5. Once the height of the bottle trap has been determined, tighten the connecting nut (3).
6. Upon completion, fully check the installation and ensure there are no leaks.

GENERAL INSTALLATION TIPS

- Handle parts carefully and consider wearing gloves for living and brushed finishes.
- Only use water or soapy water to clean visible parts.
- Where silicone is required, only use neutral cure silicone.
- Chemicals should be kept away from this product. Splashes and sometimes vapours from household cleaning fluids, marble sealers and grout haze removers can cause damage.